

Micro Commercial Components

Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311

Phone: (818) 701-4933 (818) 701-4939 Fax:

MMBTA05 **THRU MMBTA06**

Features

- **Epitaxial Planar Die Construction**
- Complementary PNP Types Available (MMBTA55/MMBTA56)
- Ideal for Medium Power Amplification and Switching.
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1

Marking: MMBTA05:1H/K1H MMBTA06:1GM/K1G

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage		
	MMBTA05	60	V
	MMBTA06	80	
V_{CBO}	Collector-Base Voltage		
	MMBTA05	60 V	
	MMBTA06	80	
V_{EBO}	Emitter-Base Voltage	4.0	V
Ic	Collector Current-Continuous	500	mA
P _D	Power Dissipation*	300	mW
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	357	K/W
T_J	Operating Junction Temperature	-55 to +150	$^{\circ}$ C
T_{STG}	Storage Temperature	-55 to +150	$^{\circ}\mathbb{C}$

Electrical Characteristics @ 25° Unless Otherwise Specified


Symbol	Parameter	Min	Max	Units
OFF CHARA	CTERISTICS			
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage (I _c =1.0mAdc, I _B =0) MMBTA05 60			Vdc
	MMBTA06	80		
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage (I _E =100µAdc, I _C =0)	4.0		Vdc
І _{сво}	Collector Cutoff Current (V _{CB} =60Vdc, I _E =0) MMBTA05 (V _{CB} =80Vdc, I _E =0) MMBTA06		0.1 0.1	μAdc μAdc
I _{CES}	Emitter Cutoff Current (V _{CE} =60Vdc, I _B =0) MMBTA05 (V _{CE} =80Vdc, I _B =0) MMBTA06		0.1 0.1	μAdc μAdc

ON CHARACTERISTICS

h _{FE}	DC Current Gain			
	$(V_{CE}=1.0Vdc, I_{C}=10mAdc)$	100		
	$(V_{CE}=1.0Vdc, I_{C}=100mAdc)$	100		
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage			
	(I _C =100mAdc, I _B =10mAdc)		0.25	Vdc
V _{BE(on)}	Base-Emitter On Voltage			
	(I _C =100mAdc, IB=10mAdc)		1.2	Vdc
f _T	Current-Gain—Bandwidth Product			
	(I _C =10mAdc, V _{CE} =2.0Vdc, f=100MHz)	100		MHz

^{*} Valid provided that terminals are kept at ambient temperature..

NPN Small Signal General Purpose Amplifier Transistors

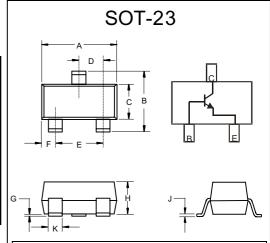


DIMENSIONS					
	INCHES		MM		
DIM	MIN	MAX	MIN	MAX	NOTE
Α	.110	.120	2.80	3.04	
В	.083	.104	2.10	2.64	
С	.047	.055	1.20	1.40	
О	.035	.041	.89	1.03	
Е	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
Ð	.0005	.0039	.013	.100	
Τ	.035	.044	.89	1.12	
٦	.003	.007	.085	.180	
K	.015	.020	.37	.51	


Suggested Solder Pad Layout inches





MMBTA05


Typical Characteristics

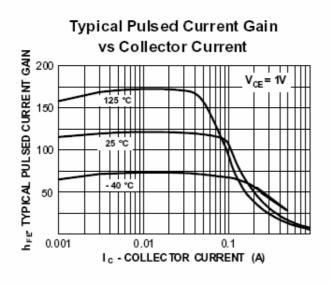


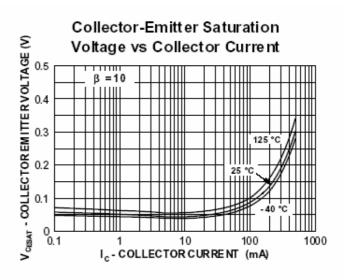

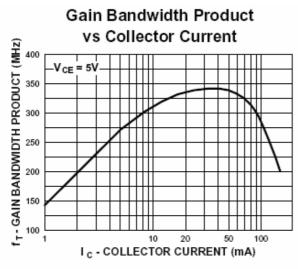

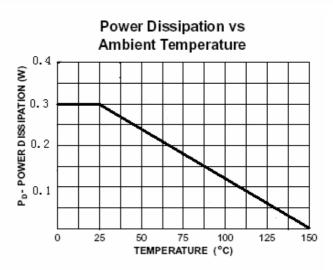

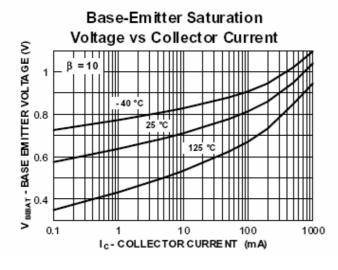


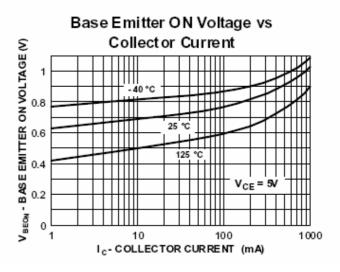





MMBTA06

Typical characteristics

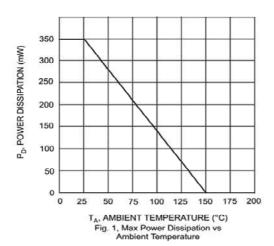


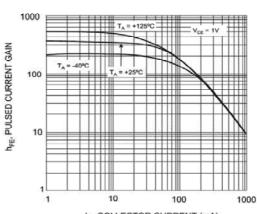

I_C. COLLECTOR CURRENT (mA) Fig. 2, Typical Pulsed Current Gain vs. Collector Current

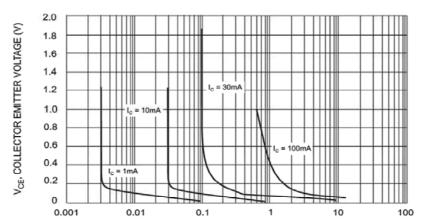

I_B, BASE CURRENT (mA) Fig. 3 Typical Collector Saturation Region

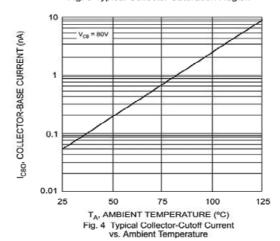



Micro Commercial Components

Ordering Information:

Device	Packing
Part Number-TP	Tape&Reel 3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.