

# KA5x0365RN-SERIES

## KA5M0365RN, KA5L0365RN Fairchild Power Switch(FPS)

### Features


- Precision Fixed Operating Frequency (67/50kHz)
- Low Start-up Current(Typ. 100uA)
- Pulse by Pulse Current Limiting
- Over Current Protection
- Over Voltage Protection (Min. 25V)
- Internal Thermal Shutdown Function
- Under Voltage Lockout
- Internal High Voltage Sense FET
- Auto-Restart Mode

### Applications


- SMPS for VCR, SVR, STB, DVD & DVCD
- SMPS for Printer, Facsimile & Scanner
- Adaptor for Camcorder

### Description

The Fairchild Power Switch(FPS) product family is specially designed for an off-line SMPS with minimal external components. The Fairchild Power Switch(FPS) consists of a high voltage power SenseFET and a current mode PWM IC. Included PWM controller integrates the fixed frequency oscillator, the under voltage lock-out, the leading edge blanking, the optimized gate turn-on/turn-off driver, the thermal shutdown protection, the over voltage protection, and the temperature compensated precision current sources for the loop compensation and the fault protection circuitry. Compared to a discrete MOSFET and a PWM controller or an RCCsolution, a Fairchild Power Switch(FPS) can reduce the total component count, design size and weight and at the same time increase efficiency, productivity, and system reliability. It has a basic platform well suited for the cost effective design in either a flyback converter or a forward converter

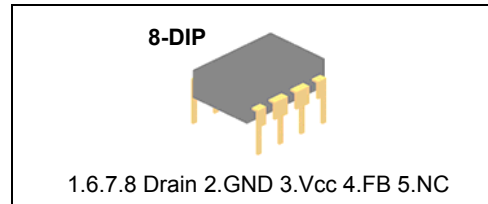

### Internal Block Diagram

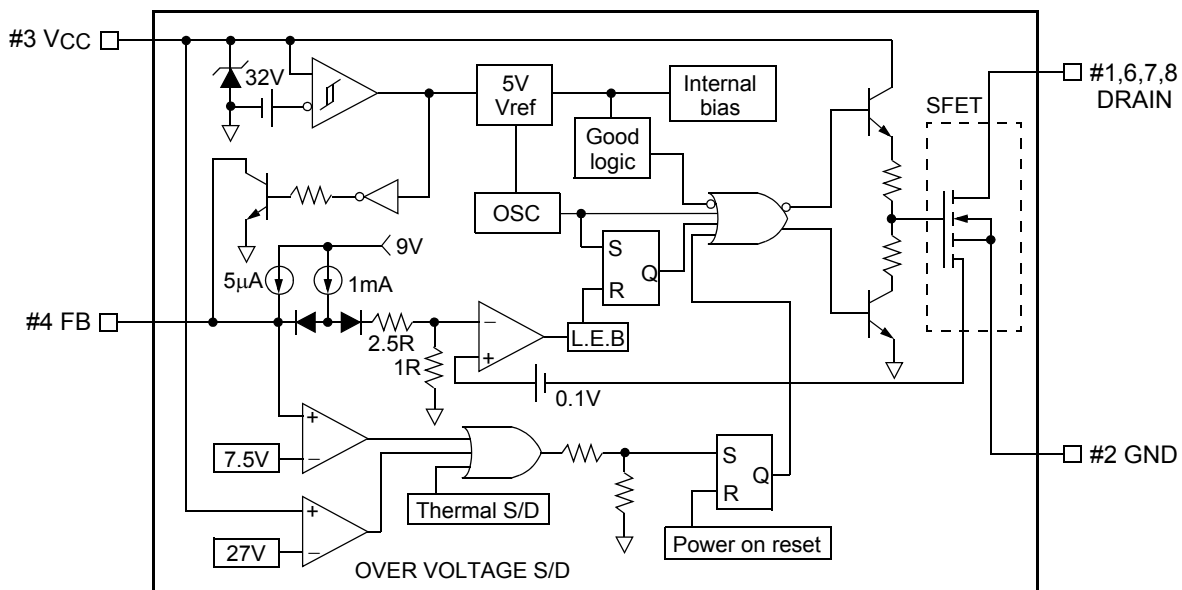

Rev.1.0.6

## Absolute Maximum Ratings

(Ta=25°C, unless otherwise specified)

| Characteristic                                | Symbol              | Value                   | Unit |
|---|---------------------|-------------------------|------|
| <b>KA5M0365RN, KA5L0365RN</b>                 |                     |                         |      |
| Drain-Gate Voltage (R <sub>GS</sub> =1MΩ)     | V <sub>DGR</sub>    | 650                     | V    |
| Gate-Source (GND) Voltage                     | V <sub>GS</sub>     | ±30                     | V    |
| Drain Current Pulsed <sup>(1)</sup>           | I <sub>DM</sub>     | 3                       | ADC  |
| Continuous Drain Current (Ta=25°C)            | I <sub>D</sub>      | 0.42                    | ADC  |
| Continuous Drain Current (Ta=100°C)           | I <sub>D</sub>      | 0.28                    | ADC  |
| Single Pulsed Avalanche Energy <sup>(2)</sup> | E <sub>AS</sub>     | 127                     | mJ   |
| Maximum Supply Voltage                        | V <sub>CC,MAX</sub> | 30                      | V    |
| Analog Input Voltage Range                    | V <sub>FB</sub>     | -0.3 to V <sub>SD</sub> | V    |
| Total Power Dissipation                       | P <sub>D</sub>      | 1.56                    | W    |
|   | Derating            | 0.0125                  | W/°C |
| Operating Junction Temperature.               | T <sub>J</sub>      | +160                    | °C   |
| Operating Ambient Temperature.                | T <sub>A</sub>      | -25 to +85              | °C   |
| Storage Temperature Range.                    | T <sub>STG</sub>    | -55 to +150             | °C   |

**Note:**

1. Repetitive rating: Pulse width limited by maximum junction temperature
2. L = 51mH, starting T<sub>J</sub> = 25°C
3. L = 13μH, starting T<sub>J</sub> = 25°C

## Electrical Characteristics (SenseFET Part)

(Ta = 25°C unless otherwise specified)

| Parameter   | Symbol  | Condition  | Min. | Typ.  | Max.  | Unit |
|---|---------|--|------|-------|-------|------|
| <b>KA5M0365RN, KA5L0365RN</b>                       |         |  |      |       |       |      |
| Drain-Source Breakdown Voltage                      | BVDSS   | VGS=0V, ID=50μA  | 650  | -     | -     | V    |
| Zero Gate Voltage Drain Current                     | IDSS    | VDS=Max. Rating, VGS=0V  | -    | -     | 50    | μA   |
|   |         | VDS=0.8Max. Rating, VGS=0V, TC=125°C   | -    | -     | 200   | μA   |
| Static Drain-Source on Resistance <sup>(Note)</sup> | RDS(ON) | VGS=10V, ID=0.5A   | -    | 3.6   | 4.5   | Ω    |
| Forward Transconductance <sup>(Note)</sup>          | gfs     | VDS=50V, ID=0.5A   | 2.0  | -     | -     | S    |
| Input Capacitance                                   | Ciss    | VGS=0V, VDS=25V, f=1MHz  | -    | 314.9 | -     | pF   |
| Output Capacitance                                  | Coss    |  | -    | 47    | -     |      |
| Reverse Transfer Capacitance                        | Crss    |  | -    | 9     | -     |      |
| Turn On Delay Time                                  | td(on)  | VDD=0.5BVDSS, ID=1.0A (MOSFET switching time is essentially independent of operating temperature)          | -    | 11.2  | -     | nS   |
| Rise Time   | tr      |  | -    | 34    | -     |      |
| Turn Off Delay Time                                 | td(off) |  | -    | 28.2  | -     |      |
| Fall Time   | tf      |  | -    | 32    | -     |      |
| Total Gate Charge (Gate-Source+Gate-Drain)          | Qg      | VGS=10V, ID=1.0A, VDS=0.5BVDSS (MOSFET switching time is essentially independent of operating temperature) |      |       | 11.93 | nC   |
| Gate-Source Charge                                  | Qgs     |  | -    | 1.95  | -     |      |
| Gate-Drain (Miller) Charge                          | Qgd     |  |      | 6.85  |       |      |

### Note:

1. Pulse test: Pulse width ≤ 300μS, duty ≤ 2%

2.  $S = \frac{1}{R}$

**Electrical Characteristics (Control Part)** (Continued)


(Ta = 25°C unless otherwise specified)

| Characteristic                                   | Symbol             | Test condition        | Min. | Typ. | Max. | Unit  |
|--|--------------------|-----------------------|------|------|------|-------|
| <b>UVLO SECTION</b>                              |                    |                       |      |      |      |       |
| Start Threshold Voltage                          | VSTART             | VFB=GND               | 14   | 15   | 16   | V     |
| Stop Threshold Voltage                           | VSTOP              | VFB=GND               | 8.4  | 9    | 9.6  | V     |
| <b>OSCILLATOR SECTION</b>                        |                    |                       |      |      |      |       |
| Initial Accuracy                                 | FOSC               | KA5M0365RN            | 61   | 67   | 73   | kHz   |
| Initial Accuracy                                 | FOSC               | KA5L0365RN            | 45   | 50   | 55   | kHz   |
| Frequency Change With Temperature <sup>(2)</sup> | -                  | -25°C≤Ta≤+85°C        | -    | ±5   | ±10  | %     |
| Maximum Duty Cycle                               | Dmax               |                       | 72   | 77   | 82   | %     |
| <b>FEEDBACK SECTION</b>                          |                    |                       |      |      |      |       |
| Feedback Source Current                          | IFB                | Ta=25°C, 0V≤Vfb≤3V    | 0.7  | 0.9  | 1.1  | mA    |
| Shutdown Feedback Voltage                        | VSD                | Vfb≥6.5V              | 6.9  | 7.5  | 8.1  | V     |
| Shutdown Delay Current                           | Idelay             | Ta=25°C, 5V≤Vfb≤VSD   | 4    | 5    | 6    | μA    |
| <b>REFERENCE SECTION</b>                         |                    |                       |      |      |      |       |
| Output Voltage <sup>(1)</sup>                    | Vref               | Ta=25°C               | 4.80 | 5.00 | 5.20 | V     |
| Temperature Stability <sup>(1)(2)</sup>          | Vref/ΔT            | -25°C≤Ta≤+85°C        | -    | 0.3  | 0.6  | mV/°C |
| <b>CURRENT LIMIT(SELF-PROTECTION)SECTION</b>     |                    |                       |      |      |      |       |
| Peak Current Limit                               | I <sub>OVER</sub>  | Max. inductor current | 1.89 | 2.15 | 2.41 | A     |
| <b>PROTECTION SECTION</b>                        |                    |                       |      |      |      |       |
| Over Voltage Protection                          | VOVP               | VCC≥24V               | 25   | 27   | 29   | V     |
| Thermal Shutdown Temperature (Tj) <sup>(1)</sup> | TSD                | -                     | 140  | 160  | -    | °C    |
| <b>TOTAL STANDBY CURRENT SECTION</b>             |                    |                       |      |      |      |       |
| Start-up Current                                 | I <sub>START</sub> | VCC=14V               | -    | 100  | 170  | μA    |
| Operating Supply Current<br>(Control Part Only)  | I <sub>OP</sub>    | VCC≤28                | -    | 7    | 12   | mA    |


**Note:**

1. These parameters, although guaranteed, are not 100% tested in production
2. These parameters, although guaranteed, are tested in EDS(water test) process


**Typical Performance Characteristics(SenseFET part)** (Continued)  
**(KA5M0365RN, KA5L0365RN)**

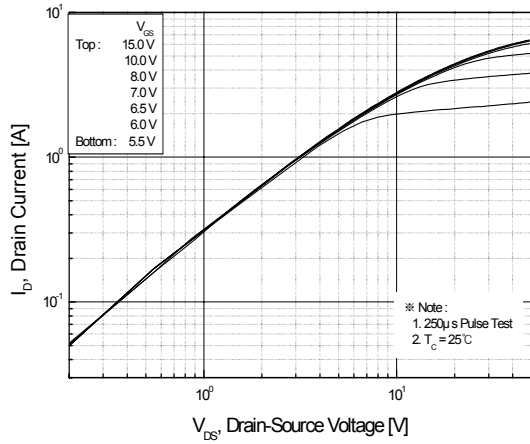


**Figure 1. Output Characteristics**

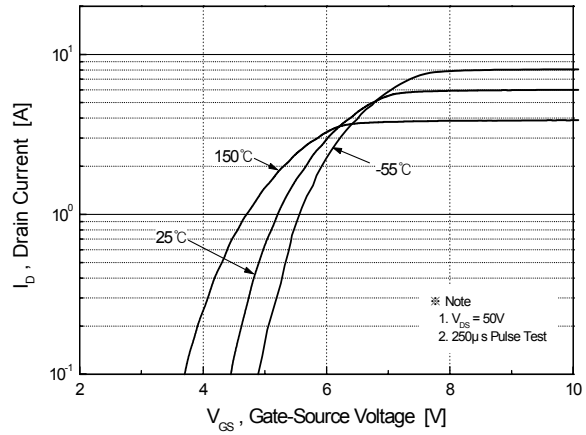


**Figure 2. Transfer Characteristics**

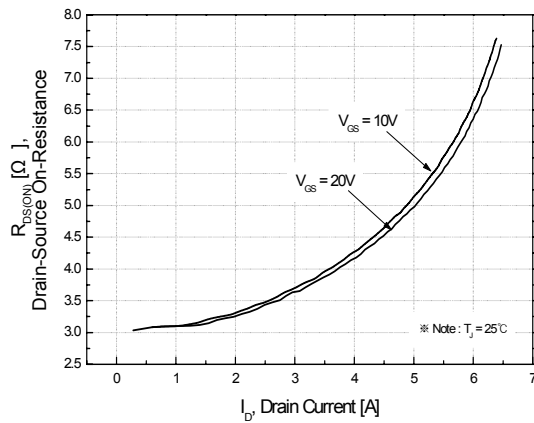


**Figure 3. On-Resistance vs. Drain Current**

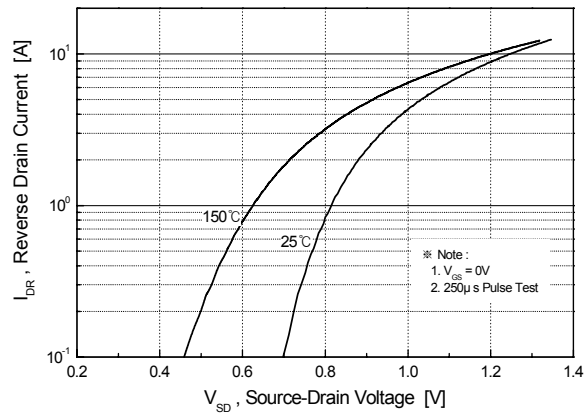

**Figure 4. Source-Drain Diode Forward Voltage**

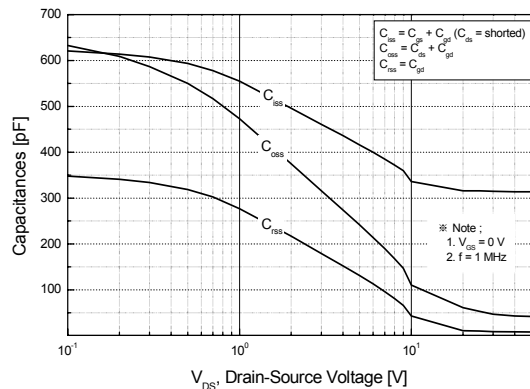


**Figure 5. Capacitance vs. Drain-Source Voltage**

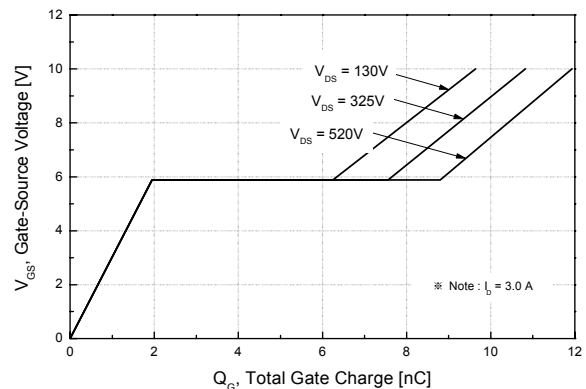


**Figure 6. Gate Charge vs. Gate-Source Voltage**


**Typical Performance Characteristics** (Continued)  
 ( KA5M0365RN, KA5L0365RN)

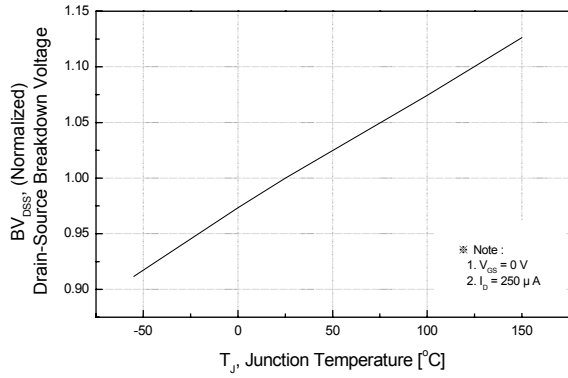


**Figure 7. Breakdown Voltage vs. Temperature**

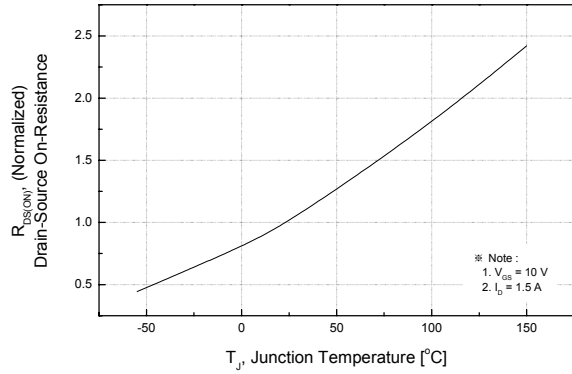


**Figure 8. On-Resistance vs. Temperature**

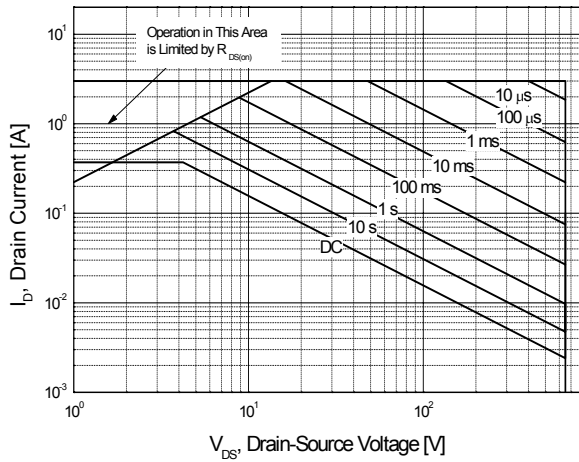

**Figure 9. Max. Safe Operating Area**

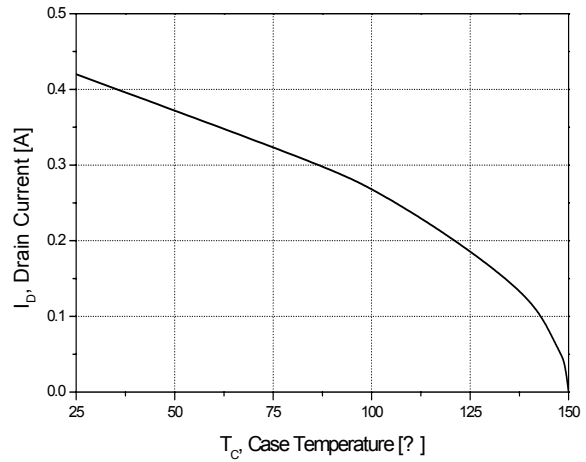

**Figure 10. Max. Drain Current vs. Case Temperature**

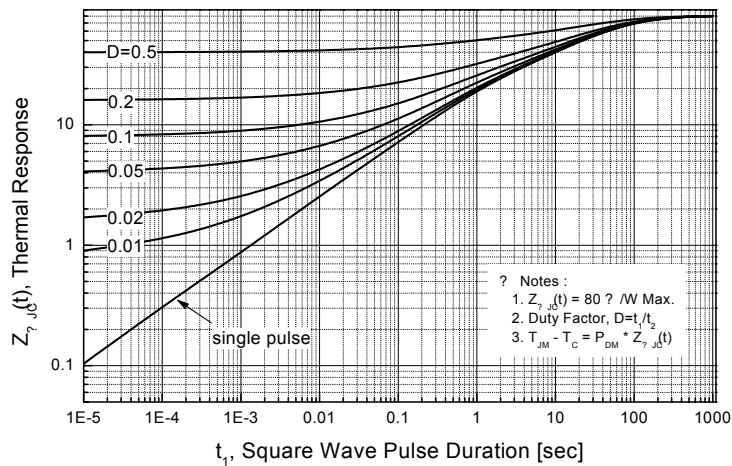

**Figure 11. Thermal Response**

## Typical Performance Characteristics (Control Part) (Continued)

(These characteristic graphs are normalized at  $T_a = 25^\circ\text{C}$ )

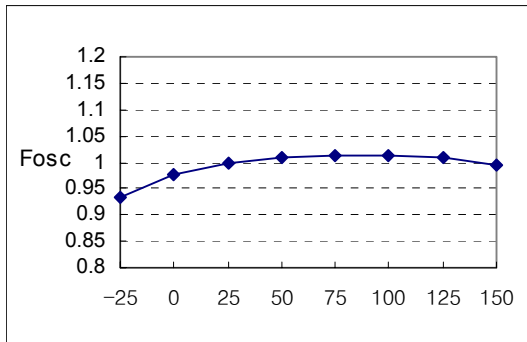


Figure 1. Operating Frequency

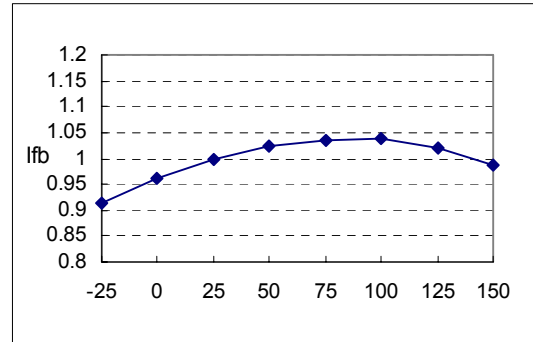


Figure 2. Feedback Source Current

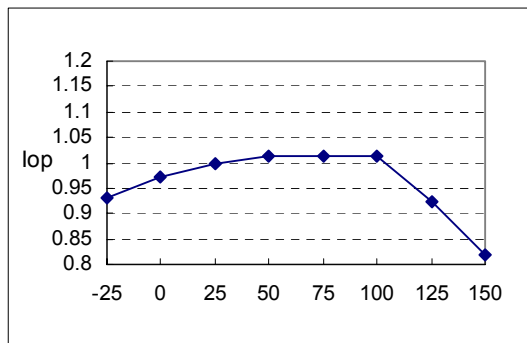


Figure 3. Operating Supply Current

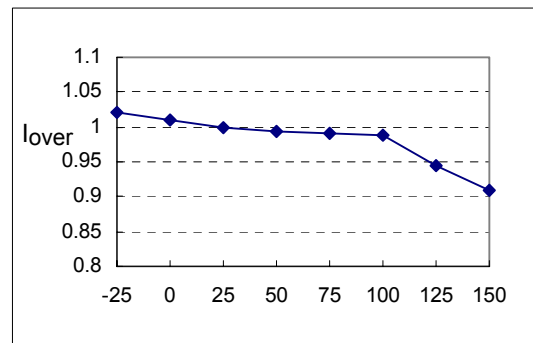


Figure 4. Peak Current Limit

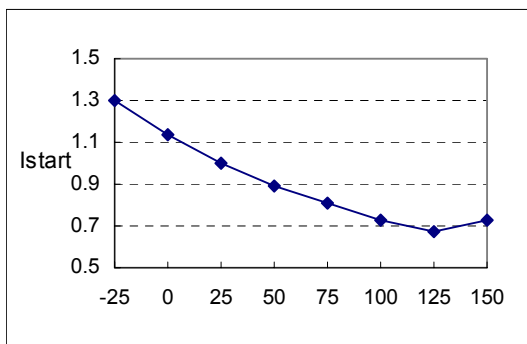


Figure 5. Start up Current

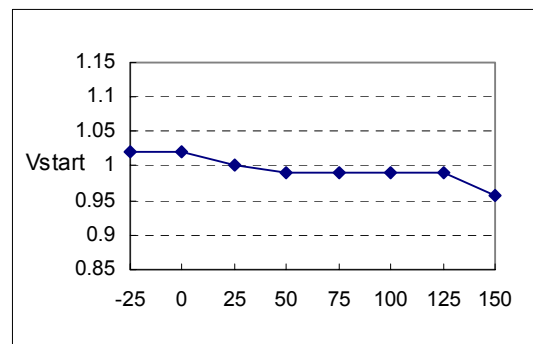


Figure 6. Start Threshold Voltage

**Typical Performance Characteristics** (Continued)

(These characteristic graphs are normalized at  $T_a = 25^\circ\text{C}$ )

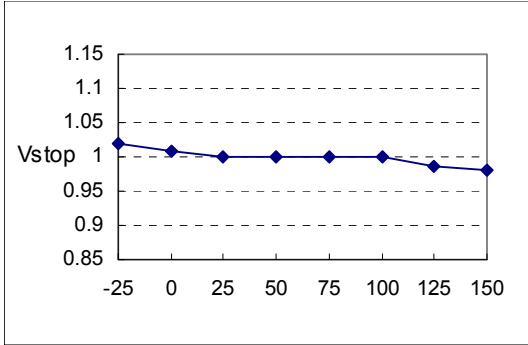


Figure 7. Stop Threshold Voltage

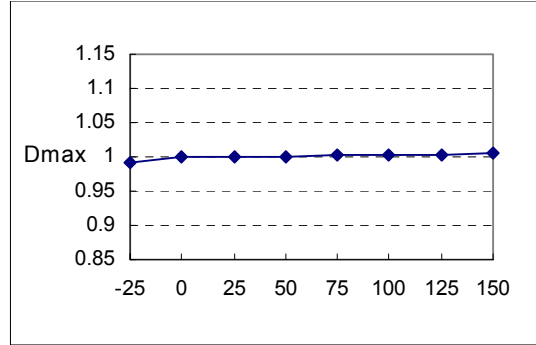


Figure 8. Maximum Duty Cycle

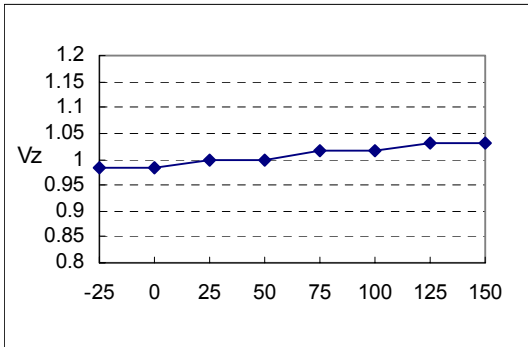


Figure 9. VCC Zener Voltage

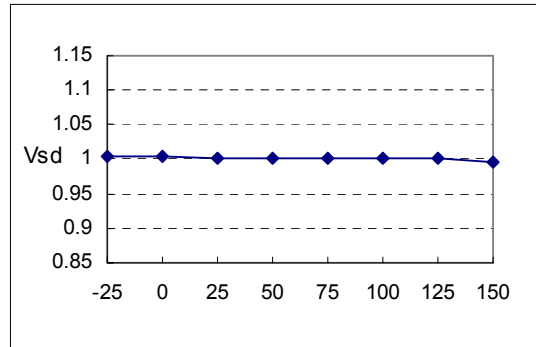


Figure 10. Shutdown Feedback Voltage

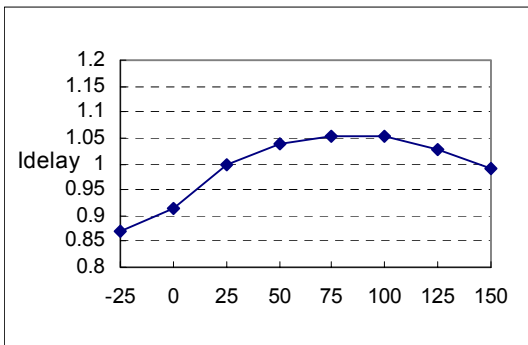


Figure 11. Shutdown Delay Current

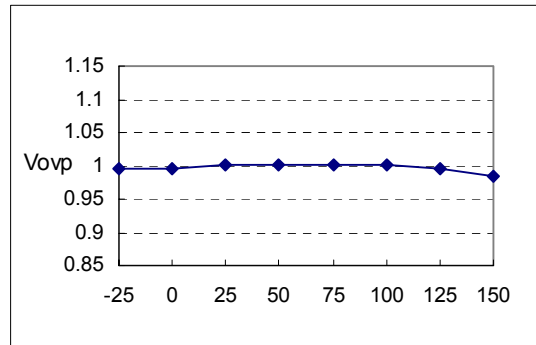


Figure 12. Over Voltage Protection



**Typical Performance Characteristics** (Continued)

(These characteristic graphs are normalized at  $T_a = 25^\circ\text{C}$ )

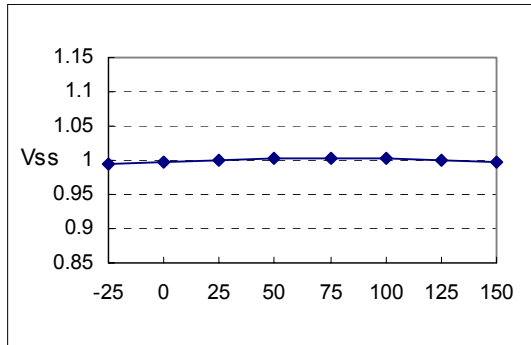


Figure 13. Soft Start Voltage


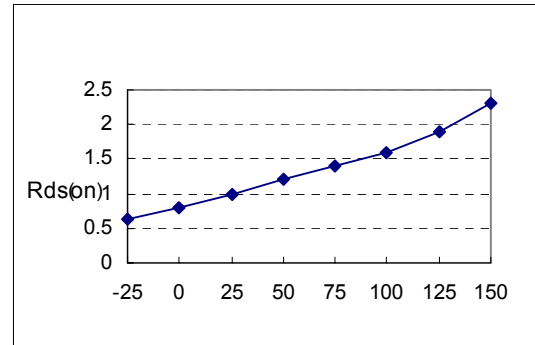


Figure 14. Static Drain-Source on Resistance

Package Dimensions

8-DIP

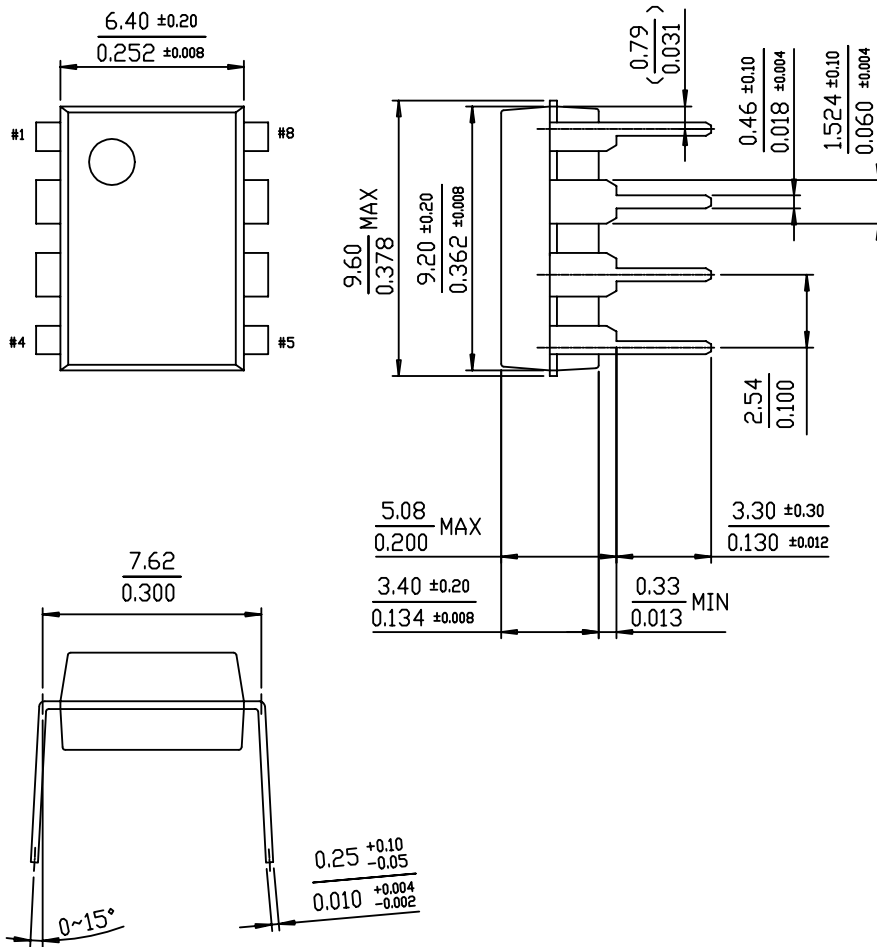

---

**Ordering Information**

| Product Number | Package | Marking Code | BVDSS | FOSC  | RDS(on) |
|----------------|---------|--------------|-------|-------|---------|
| KA5M0365RN     | 8-DIP   | 5M0365R      | 650V  | 67kHz | 3.6Ω    |
| KA5L0365RN     | 8-DIP   | 5L0365R      | 650V  | 50kHz | 3.6Ω    |

**DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.