



SIPMOS® Power Transistor

Features

- N channel
- Enhancement mode
- Avalanche rated
- dv/dt rated
- 175 °C operating temperature

Product Summary

Drain source voltage	V_{DS}	55	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.018	Ω
Continuous drain current	I_D	52	A



Type	Package	Ordering Code	Packaging	Pin 1	Pin 2	Pin 3
BUZ102S	P-TO220-3-1	Q67040-S4011-A2	Tube	G	D	S
BUZ102S E3045A	P-TO263-3-2	Q67040-S4011-A6	Tape and Reel			
BUZ102S E3045	P-TO263-3-2	Q67040-S4011-A5	Tube			

Maximum Ratings, at $T_j = 25\text{ °C}$ unless unless specified

Parameter	Symbol	Value	Unit
Continuous drain current	I_D	52	A
$T_C = 25\text{ °C}$		52	
$T_C = 100\text{ °C}$		37	
Pulsed drain current	I_{Dpulse}	208	
$T_C = 25\text{ °C}$			
Avalanche energy, single pulse	E_{AS}	245	mJ
$I_D = 52\text{ A}$, $V_{DD} = 25\text{ V}$, $R_{GS} = 25\ \Omega$			
Avalanche energy, periodic limited by T_{jmax}	E_{AR}	12	
Reverse diode dv/dt	dv/dt	6	kV/ μ s
$I_S = 52\text{ A}$, $V_{DS} = 40\text{ V}$, $di/dt = 200\text{ A}/\mu$ s, $T_{jmax} = 175\text{ °C}$			
Gate source voltage	V_{GS}	± 20	V
Power dissipation	P_{tot}	120	W
$T_C = 25\text{ °C}$			
Operating and storage temperature	T_j, T_{stg}	-55... +175	$^{\circ}\text{C}$
IEC climatic category; DIN IEC 68-1		55/175/56	

Thermal Characteristics

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Characteristics					
Thermal resistance, junction - case	R_{thJC}	-		1.25	K/W
Thermal resistance, junction - ambient, leded	R_{thJA}	-		62	
SMD version, device on PCB: @ min. footprint @ 6 cm ² cooling area ¹⁾	R_{thJA}	-	-	62 40	

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain- source breakdown voltage $V_{GS} = 0\text{ V}$, $I_D = 0.25\text{ mA}$, $T_j = 25\text{ }^\circ\text{C}$	$V_{(BR)DSS}$	55	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D = 90\text{ }\mu\text{A}$	$V_{GS(th)}$	2.1	3	4	
Zero gate voltage drain current $V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 25\text{ }^\circ\text{C}$ $V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$, $T_j = 150\text{ }^\circ\text{C}$	I_{DSS}	-	0.1	1 100	μA
Gate-source leakage current $V_{GS} = 20\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	-	10	100	
Drain-Source on-state resistance $V_{GS} = 10\text{ V}$, $I_D = 37\text{ A}$	$R_{DS(on)}$	-	0.0155	0.018	Ω

¹ Device on 40mm*40mm*1.5mm epoxy PCB FR4 with 6 cm² (one layer, 70 μm thick) copper area for drain connection. PCB is vertical without blown air.

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$, $I_D = 37\text{ A}$	g_{fs}	10	28	-	S
Input capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{iss}	-	1220	1525	pF
Output capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{oss}	-	410	515	
Reverse transfer capacitance $V_{GS} = 0\text{ V}$, $V_{DS} = 25\text{ V}$, $f = 1\text{ MHz}$	C_{rss}	-	210	265	
Turn-on delay time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 52\text{ A}$, $R_G = 6.8\text{ }\Omega$	$t_{d(on)}$	-	12	18	ns
Rise time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 52\text{ A}$, $R_G = 6.8\text{ }\Omega$	t_r	-	22	33	
Turn-off delay time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 52\text{ A}$, $R_G = 6.8\text{ }\Omega$	$t_{d(off)}$	-	30	45	
Fall time $V_{DD} = 30\text{ V}$, $V_{GS} = 10\text{ V}$, $I_D = 52\text{ A}$, $R_G = 6.8\text{ }\Omega$	t_f	-	25	40	

Electrical Characteristics, at $T_j = 25\text{ }^\circ\text{C}$, unless otherwise specified


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Gate to source charge $V_{DD} = 40\text{ V}$, $I_D = 52\text{ A}$	Q_{gs}	-	8	12	nC
Gate to drain charge $V_{DD} = 40\text{ V}$, $I_D = 52\text{ A}$	Q_{gd}	-	23	34.5	
Gate charge total $V_{DD} = 40\text{ V}$, $I_D = 52\text{ A}$, $V_{GS} = 0\text{ to }10\text{ V}$	Q_g	-	45	70	
Gate plateau voltage $V_{DD} = 40\text{ V}$, $I_D = 52\text{ A}$	$V_{(\text{plateau})}$	-	5.9	-	V

Reverse Diode

Inverse diode continuous forward current $T_C = 25\text{ }^\circ\text{C}$	I_S	-	-	52	A
Inverse diode direct current,pulsed $T_C = 25\text{ }^\circ\text{C}$	I_{SM}	-	-	208	
Inverse diode forward voltage $V_{GS} = 0\text{ V}$, $I_F = 104\text{ A}$	V_{SD}	-	1.2	1.7	V
Reverse recovery time $V_R = 30\text{ V}$, $I_F = I_S$, $di_F/dt = 100\text{ A}/\mu\text{s}$	t_{rr}	-	70	105	ns
Reverse recovery charge $V_R = 30\text{ V}$, $I_F = I_S$, $di_F/dt = 100\text{ A}/\mu\text{s}$	Q_{rr}	-	0.15	0.25	μC

Power Dissipation


$$P_{tot} = f(T_C)$$

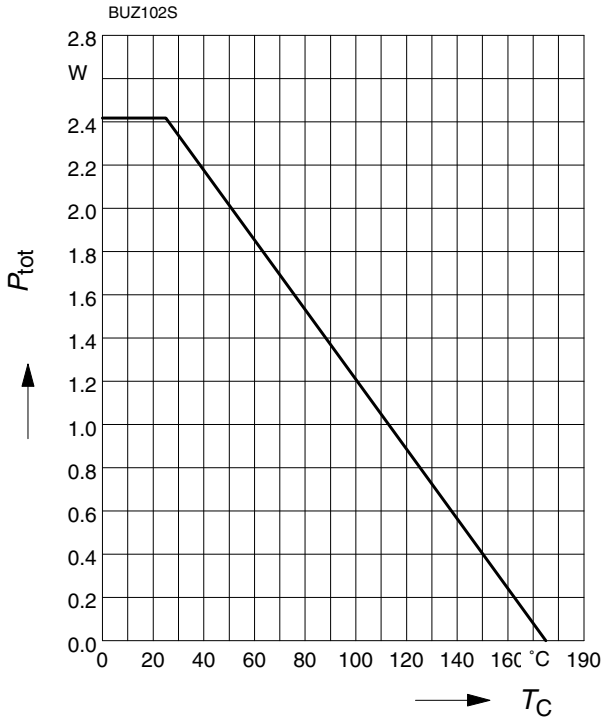

Drain current

$$I_D = f(T_C)$$


parameter: $V_{GS} \geq 10$ V

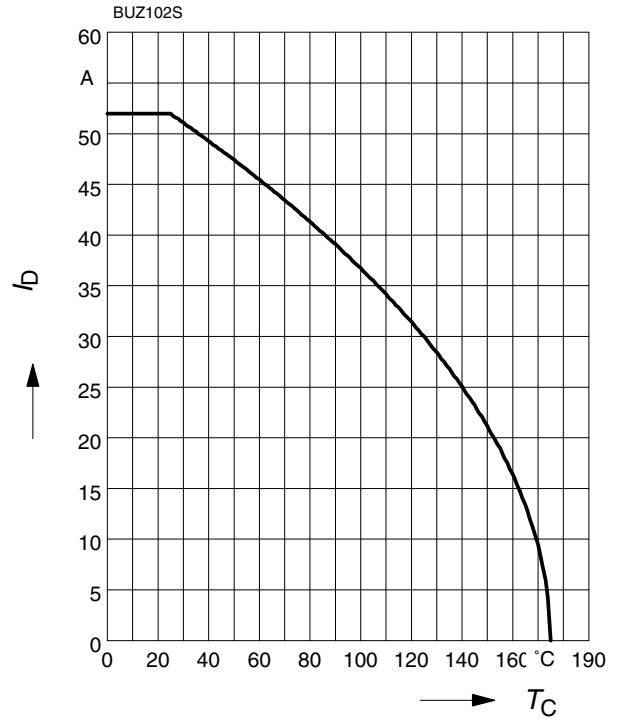

Safe operating area

$$I_D = f(V_{DS})$$


parameter : $D = 0$, $T_C = 25$ °C

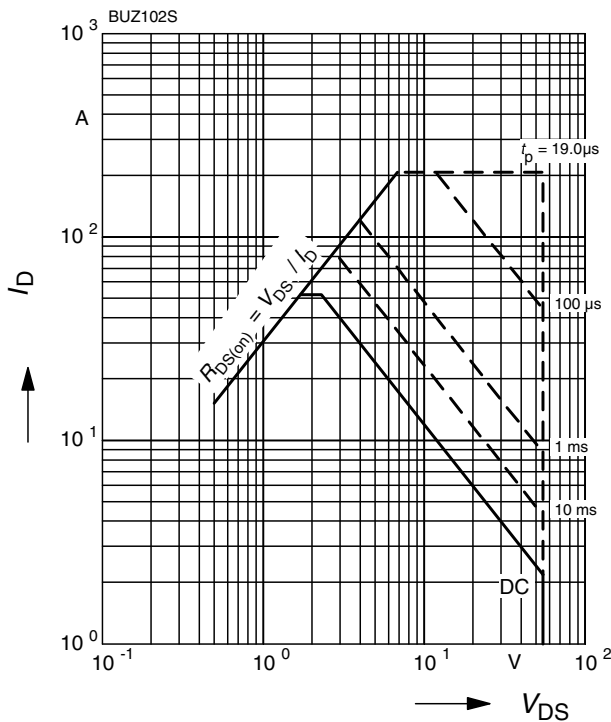

Transient thermal impedance


$$Z_{thJC} = f(t_p)$$

parameter : $D = t_p/T$

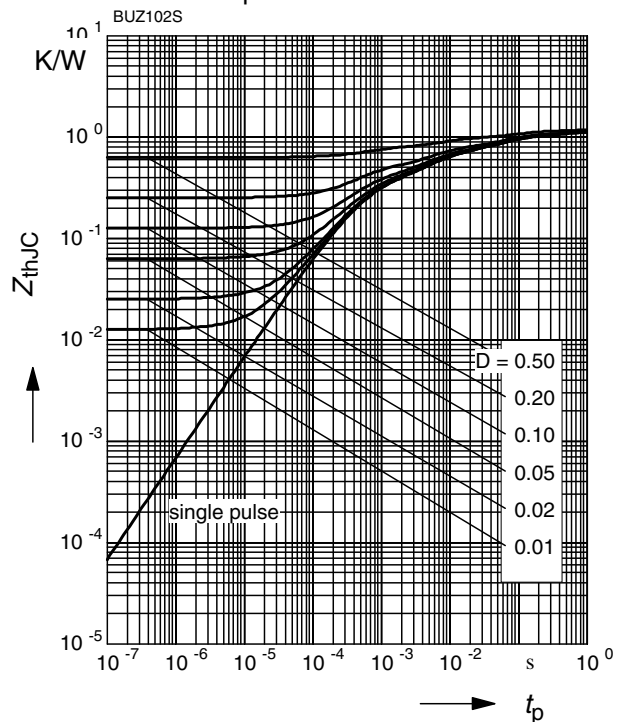


Typ. output characteristics

$I_D = f(V_{DS})$
 parameter: $t_p = 80 \mu s$

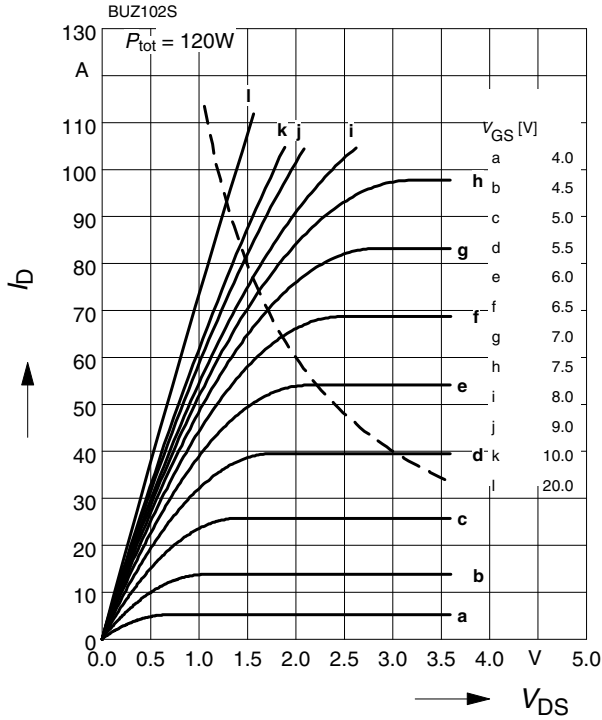


Typ. drain-source-on-resistance

$R_{DS(on)} = f(I_D)$
 parameter: V_{GS}

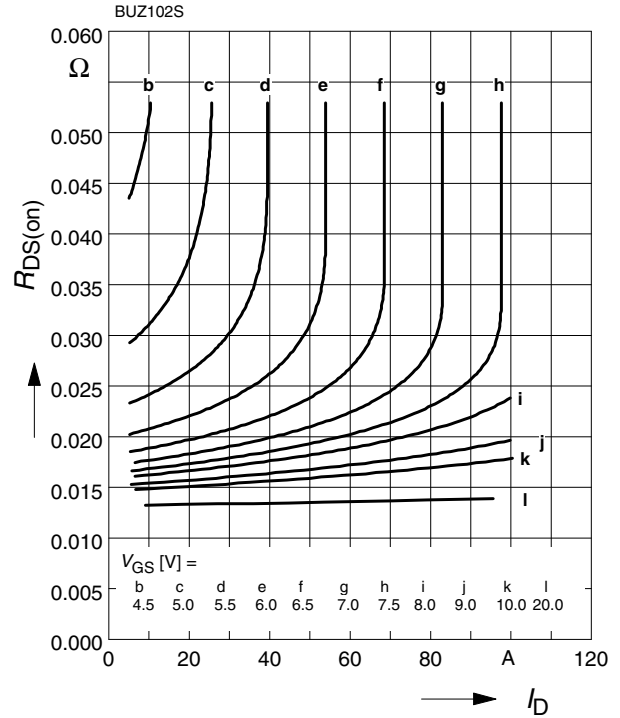


Typ. transfer characteristics $I_D = f(V_{GS})$

parameter: $t_p = 80 \mu s$
 $V_{DS} \geq 2 \times I_D \times R_{DS(on)} \max$

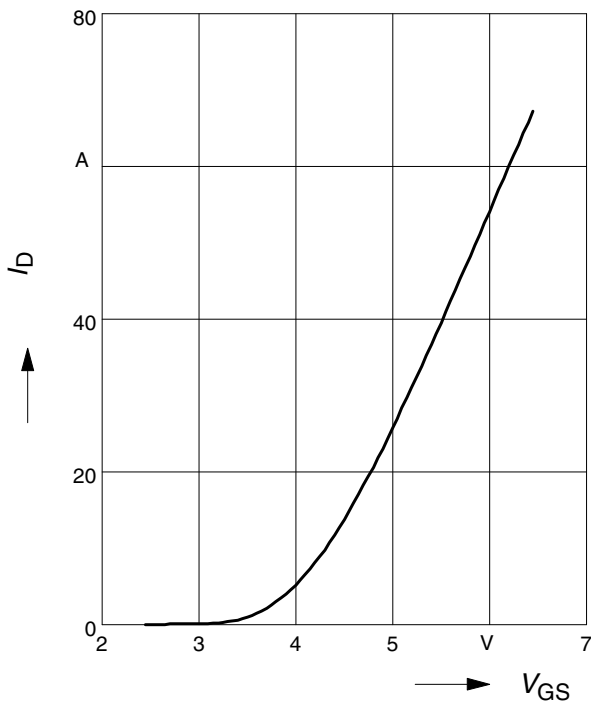

Typ. forward transconductance


$g_{fs} = f(I_D); T_j = 25^\circ C$
 parameter: g_{fs}

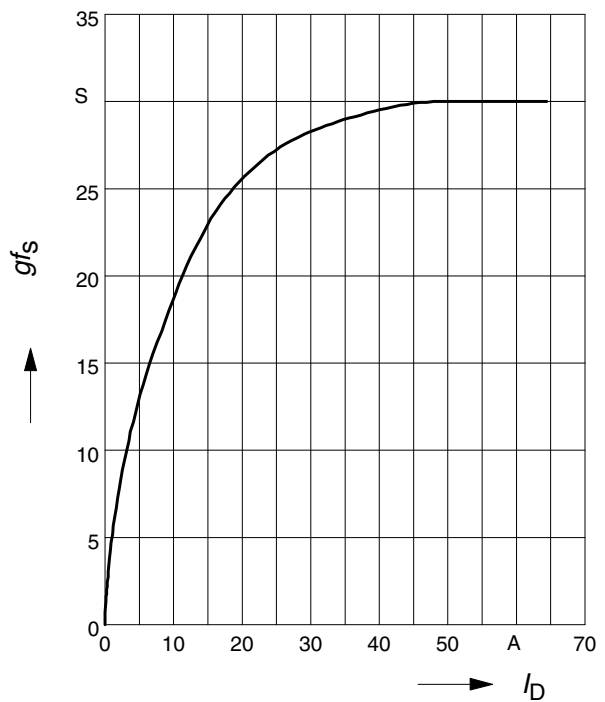

Drain-source on-resistance

$$R_{DS(on)} = f(T_j)$$


parameter : $I_D = 37 \text{ A}$, $V_{GS} = 10 \text{ V}$

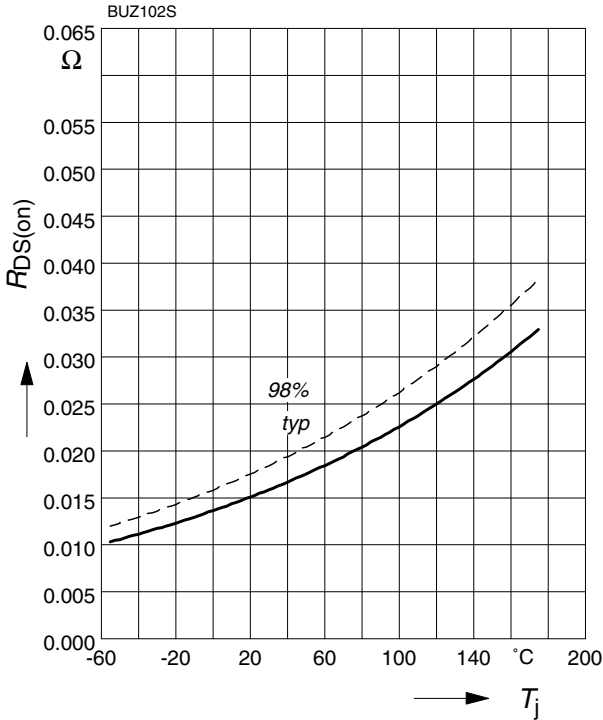

Gate threshold voltage

$$V_{GS(th)} = f(T_j)$$


parameter : $V_{GS} = V_{DS}$, $I_D = 90 \mu\text{A}$

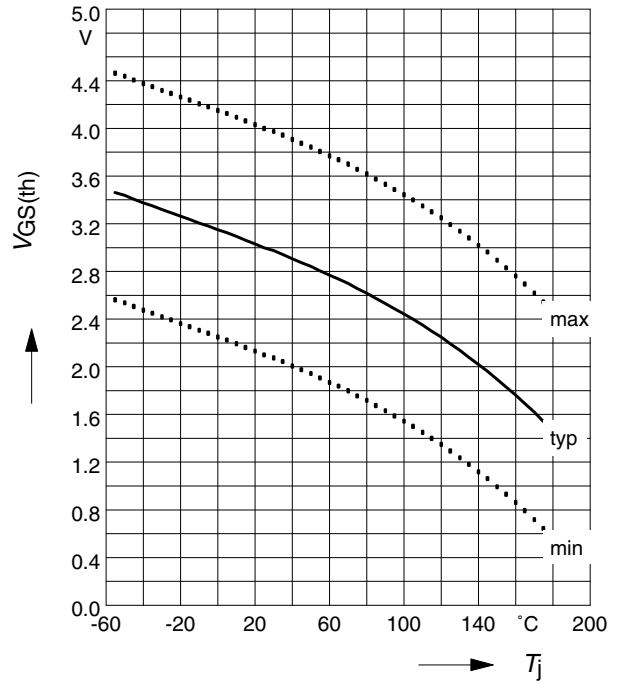

Typ. capacitances

$$C = f(V_{DS})$$


parameter: $V_{GS} = 0 \text{ V}$, $f = 1 \text{ MHz}$

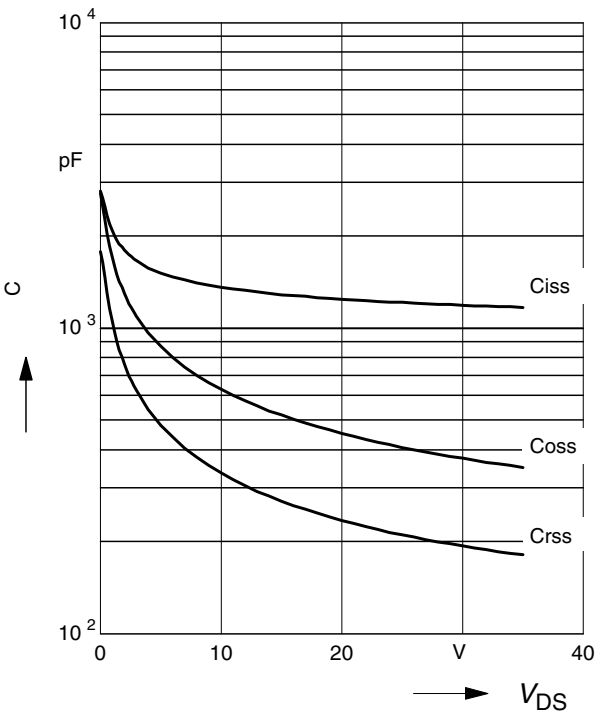

Forward characteristics of reverse diode

$$I_F = f(V_{SD})$$


parameter: T_j , $t_p = 80 \mu\text{s}$

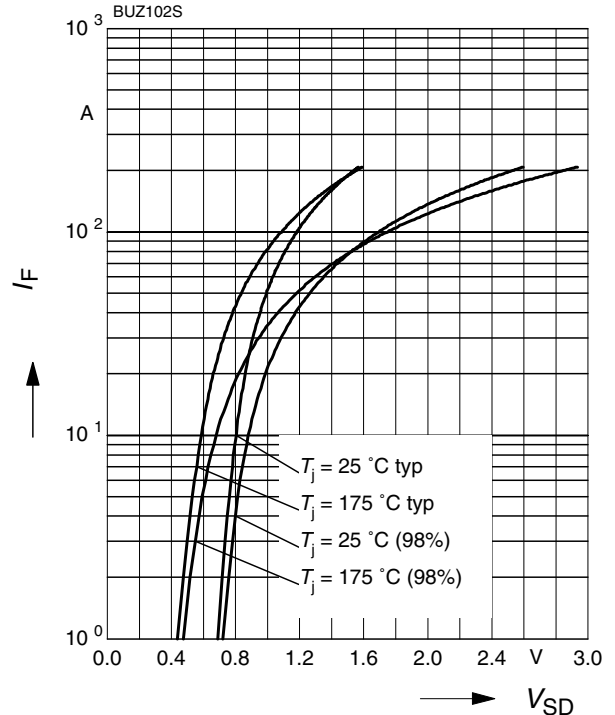

Avalanche Energy $E_{AS} = f(T_j)$

parameter: $I_D = 52\text{ A}$, $V_{DD} = 25\text{ V}$


$R_{GS} = 25\ \Omega$

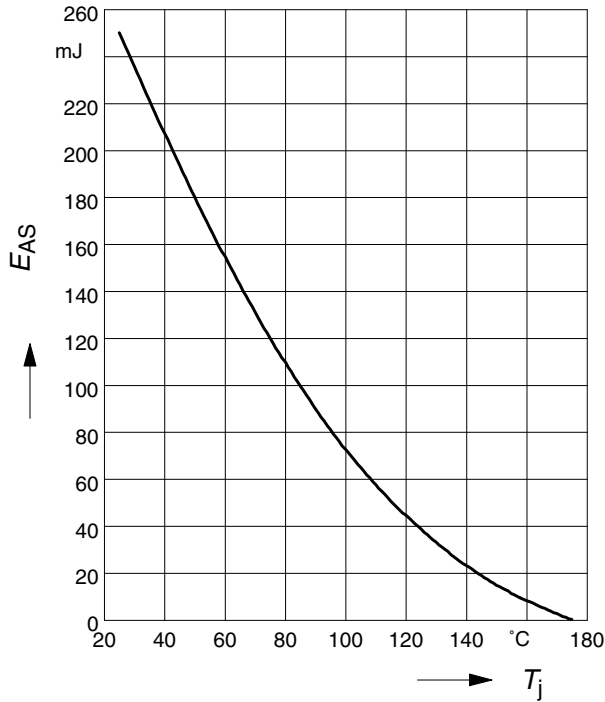

Typ. gate charge $V_{GS} = f(Q_{Gate})$


parameter: $I_{D\ puls} = 52\text{ A}$

parameter: $I_{D\ puls} = 52\text{ A}$

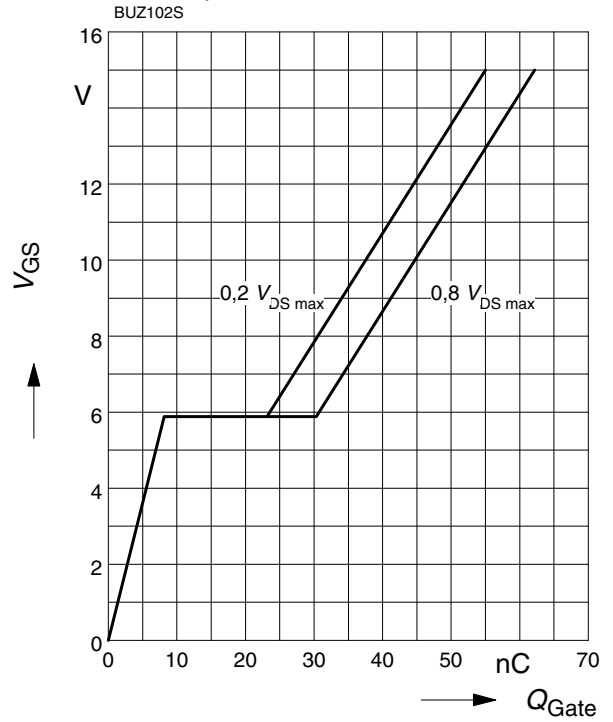

Drain-source breakdown voltage $V_{(BR)DSS} = f(T_j)$

parameter: $I_{D\ puls} = 52\text{ A}$

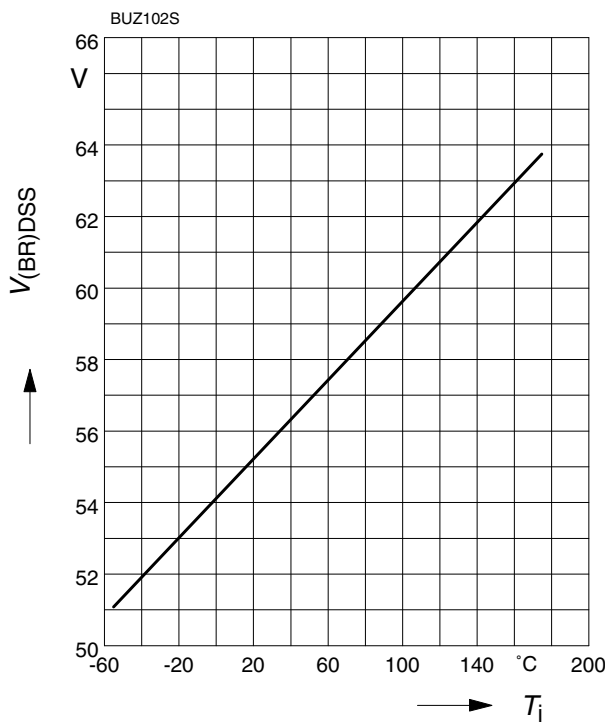

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.