TOSHIBA Bipolar Linear Integrated Circuit Silicon Monolithic

TA8041HA

Dual Voltage Regulator with Watchdog Timer

The TA8041HA is an IC specially designed for microcomputer systems. It incorporates a highly accurate 5±0.15V constant-voltage power supply and various system reset functions.
The power supply section produces two outputs : main output and sub-output. The main output can be controlled for its on / off through the EN pin.
For system reset, it has a voltage monitoring function as well as a watchdog timer which can self-diagnose the microcomputer system so that program runaway can be prevented.
It also has a reverse battery protection function, a current limiter and a thermal protection function.
Since its standby current is as small as 1mA, it can be connected directly to an automotive battery.



HZIP12-P-1.78B

Weight: 4.0 g (typ.)

Features

- Accurate output : 5±0.15V
- Difference between main and sub output voltage : ±25mV
- Output power transistor incorporated Current capacity
  : Main : 250mA (max)
  Sub : 100mA (max)
- Low standby current : 1mA (max)
- Multiple protective function : Reverse battery connection, thermal-shutdown, current limiter
- Reset function : Power-on reset, watchdog timer, low voltage detection
- Plastic HZIP-12pin

Block Diagram and Pin Layout

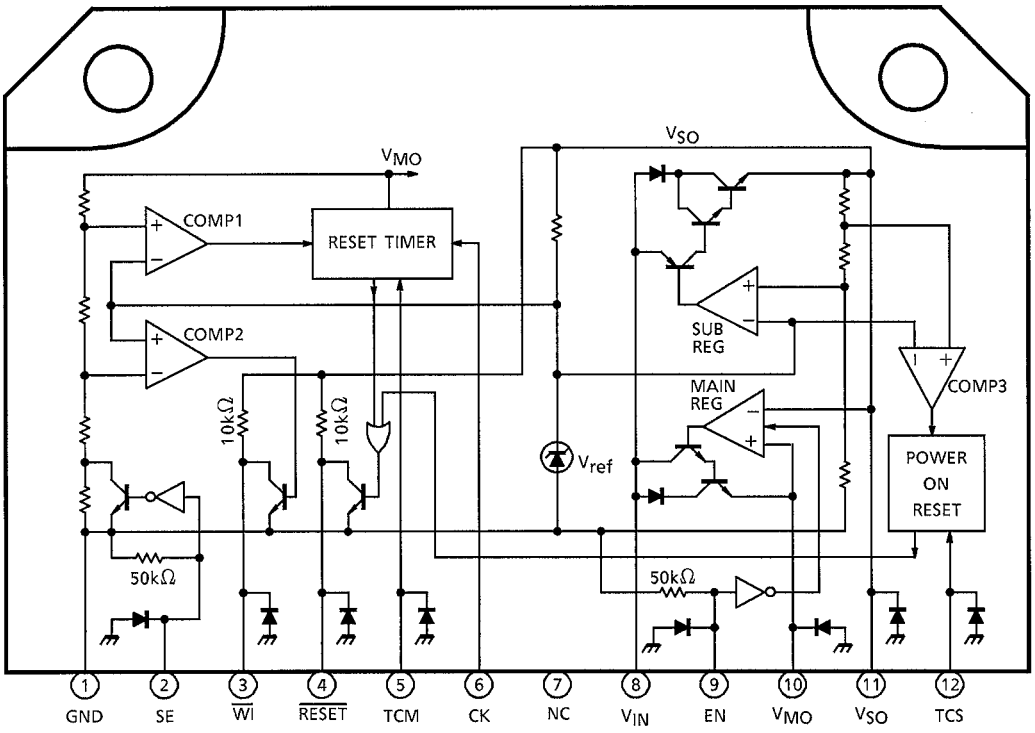

Pin Description

Pin No.	Symbol	Description
1	GND	Grounded.
2	SE	Detection voltage select pin for power monitoring : Low : V_{TH1} = 4.80V, V_{TH2} = 4.40V High : V_{TH1} = 4.60V, V_{TH2} = 4.20V It conects to 50kΩ resistor which pulled down to GND.
3	$\overline{WI}$	Reset detect voltage VTH1 output pin. The reset detect voltage has a hysteresis of 0.2V. It is the output from the collector of an NPN transistor with a pull-up resistor (10kΩ).
4	$\overline{RESET}$	Watchdog timer reset pin. ● Generates a reset signal which is determined by the C_{T2}, R_{T2} combination connected to the TCM pin. ● Intermittently generates reset pulses if no clock is supplied to the CK pin.The RESET signal is the output from the collector of an NPN transistor with a pull-up resistor (10kΩ).
5	TCM	Pin for setting a time for the reset timer and watchdog timer. It connects to a resistor R_{T2} which leads to V_{MO} and a capacitor C_{T2} which is grounded.
6	CK	Clock input pin for the watchdog timer. If it is used for a power-on reset timer only, it is pulled up to V_{MO}.
7	NC	Not connected. (Electrically, this pin is completely open.)
8	V_{IN}	Power supply pin for both main and sub power supplies.
9	EN	Enable pin for ON / OFF control of the main power output. The main output is 5V when the signal at this pin is high ; it is in standby state when the signal is low. It conects to 50kΩ resistor which pulled down to GND.
10	V_{MO}	Main output pin for 5V constant-voltage power supply. It has a current capacity of up to 250mA. This pin is also a power supply pin for the reset timer. The ON/OFF control of power supply is possible by setting EN pin.
11	V_{SO}	Sub output pin for 5V constant-voltage power supply. It has a current capacity of up to 100mA.
12	TCS	Pin for setting a time for the power-on reset timer of sub output. It connects to a resister R_{T1} which leads to V_{MO} and a capacitor C_{T1} which is grounded.It conects to 50kΩ resistor which pulled down to GND.

Timing Chart

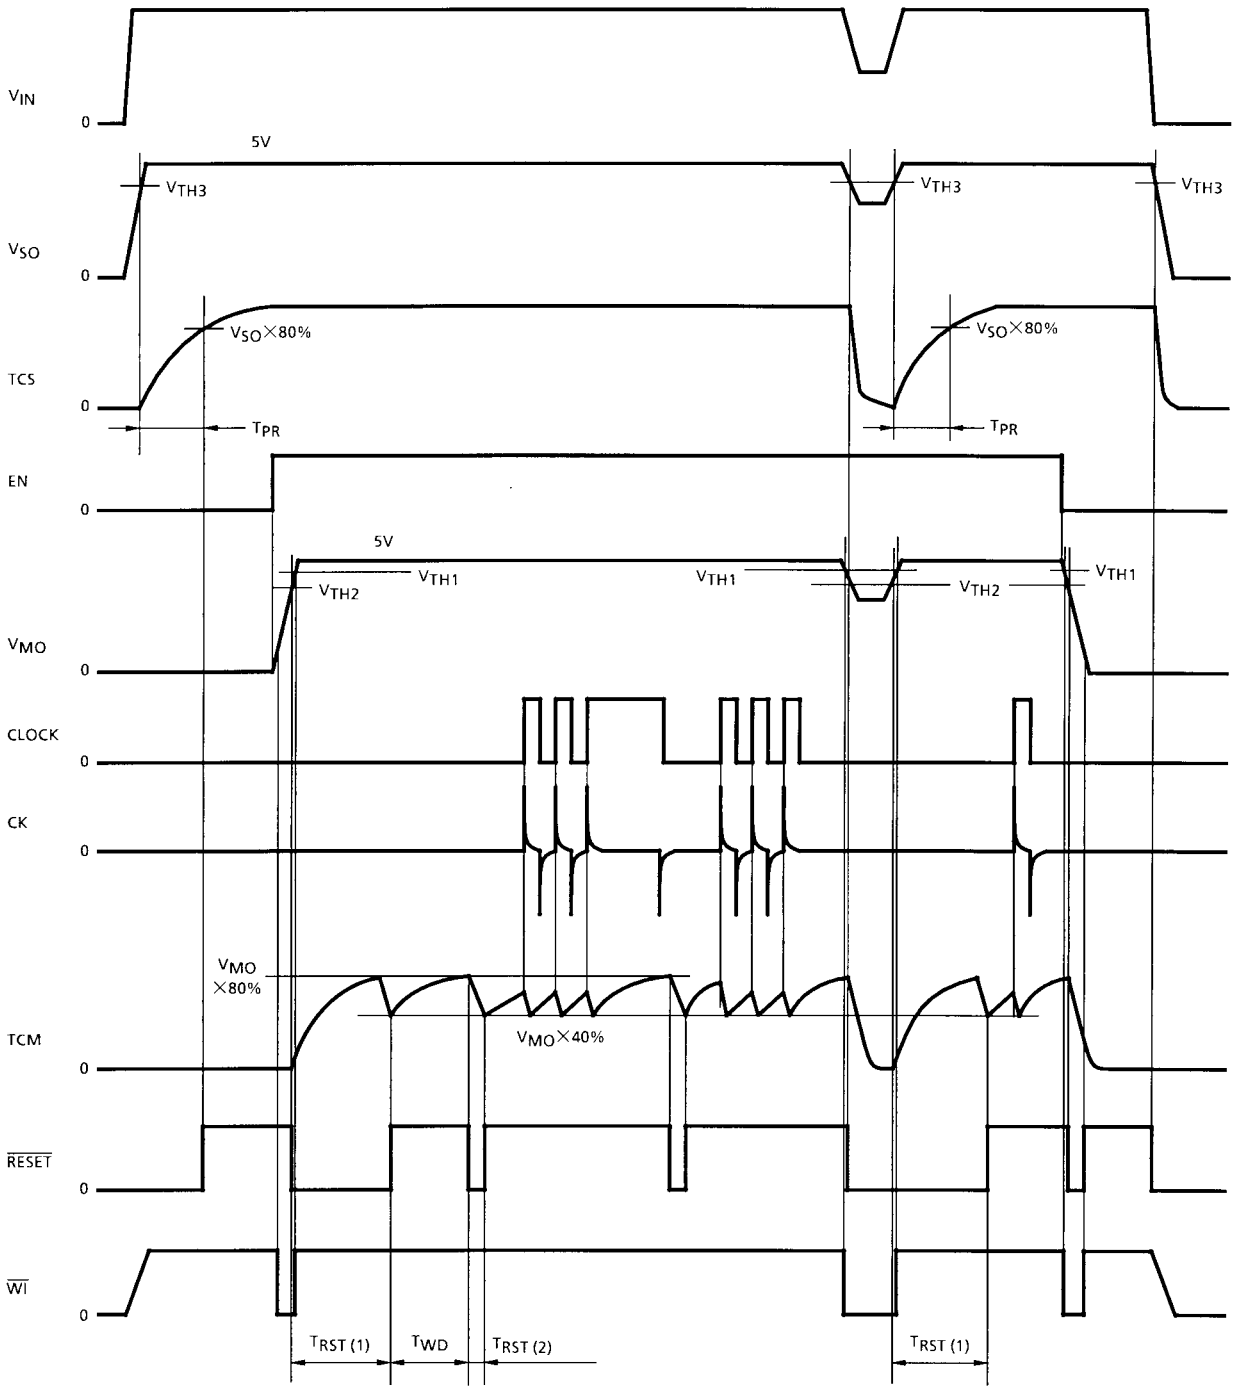

Note: See Electrical Characteristics for symbols in the timing chart.

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Pin	Rating	Unit	
Input Voltage	V_{IN1}	V_{IN}	60 (1s)	V	
	V_{IN2}	V_{IN}	−30 (Note)		
	V_{IN3}	CK	−5~V_{SO}		
	V_{IN3}	EN, SE	−0.5~V_{IN}		
Output Current	I_{LOAD-M}	V_{MO}	250	mA	
	I_{LOAD-S}	V_{SO}	100		
	I_{OUT}	$\overline{RESET}$, $\overline{WI}$	2		
Output Voltage	V_{OUT}	$\overline{RESET}$, $\overline{WI}$	V_{SO}	V	
Power Dissipation	P_D	—	25	W	*
Operating Temperature	T_{opr}	—	−40~105	°C	
Storage Temperature	T_{stg}	—	−55~150	°C	
Lead Temperature-time	T_{sol}	—	260 (10s)	°C	

Note: REVERSE BATTERY

*: On Board Condition. (Infinite radiation board)

Electrical Characteristics (V_{IN} = 7~18V, I_{LOAD-M} = 10mA, I_{LOAD-S} = 10m A, Tc = −40~105°C)

Characteristics	Symbol	Pin	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Operating Voltage	V_{SUB}	V_{SO}	—	—	4.85	5.0	5.15	V
Difference between Main and Sub Output Voltages	V_{SO}-V_{MO}	V_{SO}-V_{MO}	—	—	−25	—	25	mV
Line Regulation	V_{LINE}	$V_{MO, SO}$	—	V_{IN} = 7~40V	—	2.5	5.0	%
Load Regulation	V_{LOAD-M}	V_{MO}	—	I_{LOAD} = 1~100mA	—	0.5	2.0	%
	V_{LOAD-S}	V_{SO}	—	I_{LOAD} = 1~50mA	—	0.3	1.0	
Temperature Coefficient	—	V_{SO}	—	—	—	0.01	—	% / °C
Drop Out Voltage between I / O	V_{DROP-M}	V_{MO}	—	I_{LOAD} = 300mA	—	1.5	2.3	V
	V_{DROP-S}	V_{SO}	—	I_{LOAD} = 100mA	—	2.6	3.9	
Current Limiter	I_{LIMIT}	V_{MO}	—	—	—	250	—	mA
Thermal-Shutdown Temperature	T_{SD}	—	—	—	—	150	—	°C
Input Current	I_{IN}	EN, SE	—	V_{IN} = 5V	—	100	200	μA
				V_{IN} = 0V	—	—	10	
Input Voltage	V_{IH}	EN, SE	—	—	2.0	—	—	V
	V_{IL}		—	—	—	—	1.0	
Output Voltage	V_{OL}	$\overline{WI}$, $\overline{RESET}$	—	I_{OL} = 1mA	—	—	0.5	V
Input Current	I_{IN}	TCS	—	V_{IN} = 0~V_{SO}	−3	—	3	μA

Characteristic	Symbol	Pin	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Threshold Voltage	V_{TH}	TCS	—	—	—	V_{SO}×80%	—	V
Input Current	I_{IN}	TCM	—	V_{IN} = 0~3.5V	−3	—	3	μA
Threshold Voltage	V_{IH}	TCM	—	—	—	V_{MO}×80%	—	V
	V_{IL}		—	—	—	V_{MO}×40%	—	
Input Current	I_{IN}	CK	—	V_{IN} = 5V	—	0.17	0.35	mA
Input Voltage	V_{IH}	CK	—	—	2.0	—	—	V
	V_{IL}		—	—	—	—	0.5	
Reset Threshold Voltage	V_{TH1-H}	V_{MO}	—	SE = GND	—	V_{MO}×96%	—	V
	V_{TH1-L}		—	SE = V_{REG}	—	V_{MO}×92%	—	
	V_{TH2-H}		—	SE = GND	—	V_{MO}×88%	—	
	V_{TH2-L}		—	SE = V_{REG}	—	V_{MO}×84%	—	
	V_{TH3}	V_{SO}	—	—	—	V_{SO}×84%	—	
Standby Current	I_{ST}	V_{IN}	—	V_{IN} = 14V EN = “L”	—	0.5	1.0	mA
Power-on Reset	T_{PR}	$\overline{\text{RESET}}$	—	—	1.3×C_{T1} ×R_{T1}	1.6×C_{T1} ×R_{T1}	1.9×C_{T1} ×R_{T1}	ms
Watchdog Timer	T_{WD}	$\overline{\text{RESET}}$	—	—	0.9×C_{T2} ×R_{T2}	1.1×C_{T2} ×R_{T2}	1.3×C_{T2} ×R_{T2}	ms
Reset Timer (1)	$T_{RST\ (1)}$	$\overline{\text{RESET}}$	—	—	1.3×C_{T2} ×R_{T2}	1.6×C_{T2} ×R_{T2}	1.9×C_{T2} ×R_{T2}	ms
Reset Timer (2)	$T_{RST\ (2)}$	$\overline{\text{RESET}}$	—	—	0.3×C_{T2}	0.7×C_{T2}	1.5×C_{T2}	ms
Clock Pulse Width	T_W	CK	—	—	3	—	—	μs

VREG: Regulated Voltage of V_{SO}

Note 1: The unit for C_{T1} and C_{T2} is μF, the unit for R_{T1} and R_{T2} is kΩ.

Note 2: The specification values of Power-on Reset, Watchdog Timer and Reset Timer above are intended to guarantee only for this IC. Note that the fluctuations of C_T and R_T values should be taken into consideration for practical use of the IC.

Reset Timer Equivalent Circuit

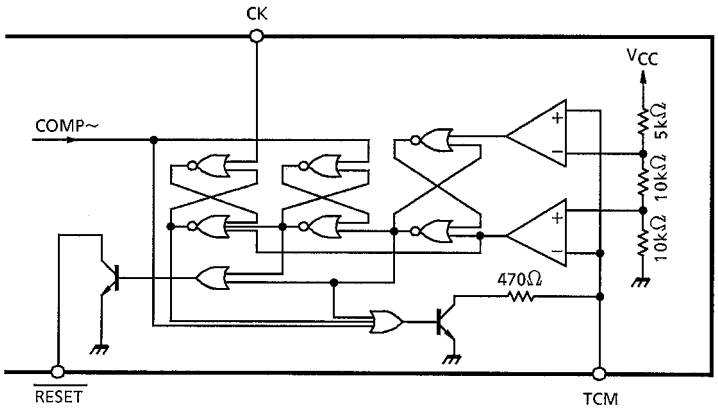

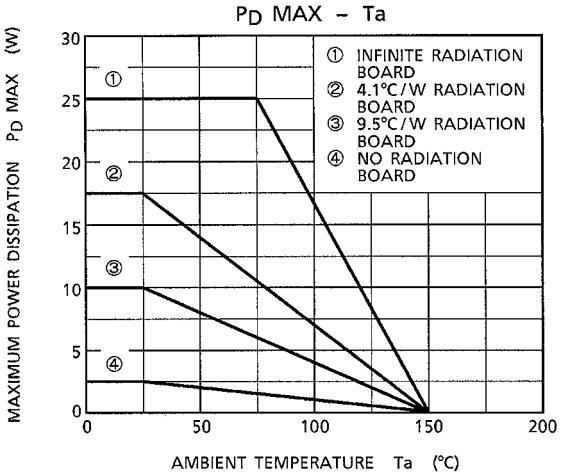

Example of Application Circuit

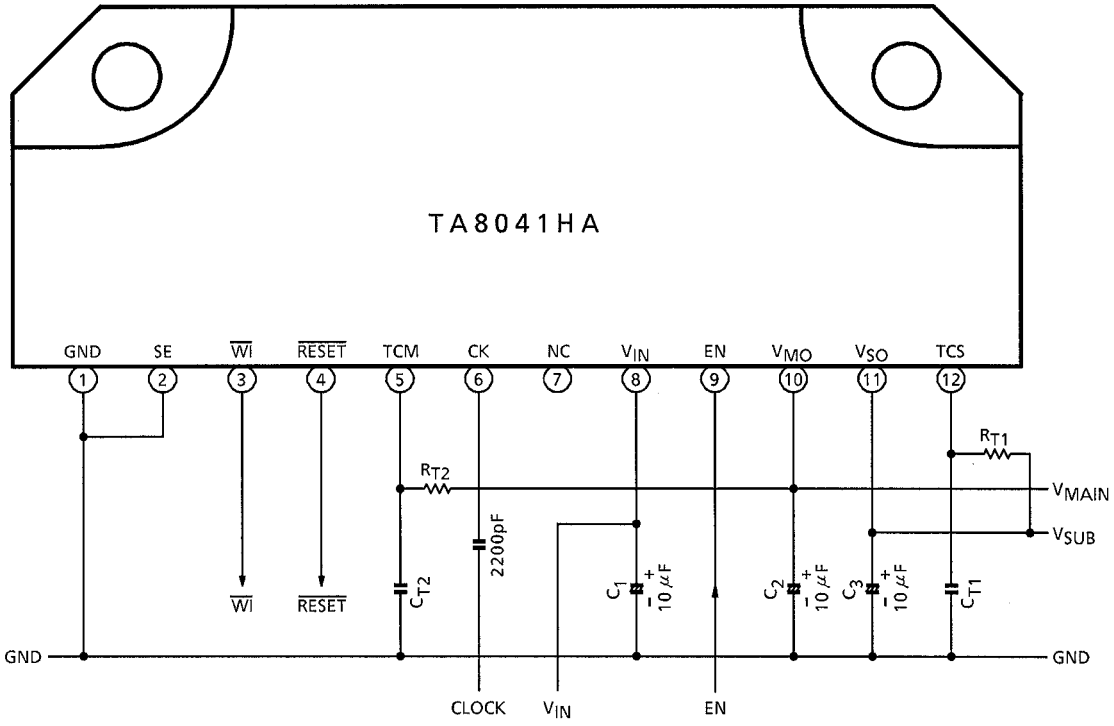

*: Caution for Wiring

1. C_1, C_2 and C_3 are for absorbing disturbance, noise, etc. Connect them as close to the IC as possible.

Recommended Conditions

PART NAME	MIN	MAX	UNIT
C_{T1}, C_{T2}	0.01	100	μF
R_{T1}, R_{T2}	5	100	kΩ

Package Dimensions

HZIP12- P-1.78B Unit: mm

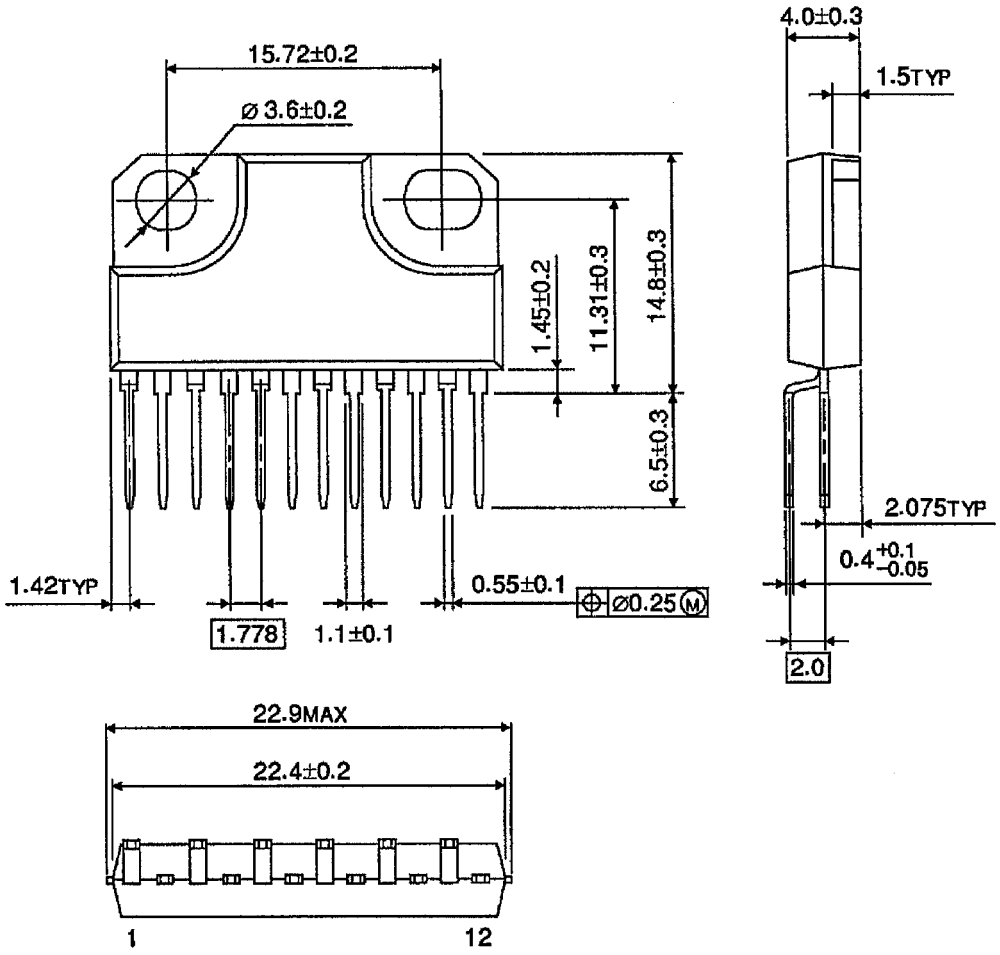

Weight: 4.0 g (typ.)

RESTRICTIONS ON PRODUCT USE

000707EAA_S

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the “Handling Guide for Semiconductor Devices,” or “TOSHIBA Semiconductor Reliability Handbook” etc..
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.