

General Description

The QM4004D is the highest performance trench N-ch MOSFETs with extreme high cell density , which provide excellent RDSON and gate charge for most of the synchronous buck converter applications .

The QM4004D meet the RoHS and Green Product requirement , 100% EAS guaranteed with full function reliability approved.

Features

- Advanced high cell density Trench technology
- Super Low Gate Charge
- Excellent CdV/dt effect decline
- 100% EAS Guaranteed
- Green Device Available

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	40	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D @ T_C = 25^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}^1$	42	A
$I_D @ T_C = 100^\circ\text{C}$	Continuous Drain Current, $V_{GS} @ 10\text{V}^1$	32	A
I_{DM}	Pulsed Drain Current ²	85	A
EAS	Single Pulse Avalanche Energy ³	69	mJ
I_{AS}	Avalanche Current	25	A
$P_D @ T_C = 25^\circ\text{C}$	Total Power Dissipation ⁴	34.7	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient (Steady State) ¹	---	62	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	3.6	°C/W

Product Summary

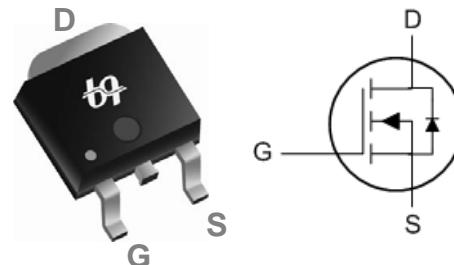


BVDSS	RDS(on)	ID
40V	11.5mΩ	42A

Applications

- High Frequency Point-of-Load Synchronous Buck Converter for MB/NB/UMPC/VGA
- Networking DC-DC Power System
- Load Switch

TO252 Pin Configuration



Electrical Characteristics ($T_J=25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$\text{V}_{\text{GS}}=0\text{V}$, $\text{I}_D=250\mu\text{A}$	40	---	---	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_J$	BVDSS Temperature Coefficient	Reference to 25°C , $\text{I}_D=1\text{mA}$	---	0.034	---	$\text{V}/^\circ\text{C}$
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$\text{V}_{\text{GS}}=10\text{V}$, $\text{I}_D=20\text{A}$	---	9.5	11.5	$\text{m}\Omega$
		$\text{V}_{\text{GS}}=4.5\text{V}$, $\text{I}_D=10\text{A}$	---	13.5	16.5	
$\text{V}_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$\text{V}_{\text{GS}}=\text{V}_{\text{DS}}$, $\text{I}_D=250\mu\text{A}$	1.0	1.5	2.5	V
$\Delta \text{V}_{\text{GS}(\text{th})}$	$\text{V}_{\text{GS}(\text{th})}$ Temperature Coefficient		---	-5.64	---	$\text{mV}/^\circ\text{C}$
I_{DSS}	Drain-Source Leakage Current	$\text{V}_{\text{DS}}=32\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $T_J=25^\circ\text{C}$	---	---	1	μA
		$\text{V}_{\text{DS}}=32\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $T_J=55^\circ\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$\text{V}_{\text{GS}}=\pm 20\text{V}$, $\text{V}_{\text{DS}}=0\text{V}$	---	---	± 100	nA
gfs	Forward Transconductance	$\text{V}_{\text{DS}}=5\text{V}$, $\text{I}_D=20\text{A}$	---	35.9	---	S
R_g	Gate Resistance	$\text{V}_{\text{DS}}=0\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	2.1	4.2	Ω
Q_g	Total Gate Charge (4.5V)	$\text{V}_{\text{DS}}=20\text{V}$, $\text{V}_{\text{GS}}=4.5\text{V}$, $\text{I}_D=12\text{A}$	---	10.7	---	nC
Q_{gs}	Gate-Source Charge		---	3.3	---	
Q_{gd}	Gate-Drain Charge		---	4.2	---	
$\text{T}_{\text{d}(\text{on})}$	Turn-On Delay Time	$\text{V}_{\text{DD}}=12\text{V}$, $\text{V}_{\text{GS}}=10\text{V}$, $\text{R}_g=3.3\Omega$	---	8.6	---	ns
T_r	Rise Time		---	3.4	---	
$\text{T}_{\text{d}(\text{off})}$	Turn-Off Delay Time		---	24.8	---	
T_f	Fall Time		---	2.2	---	
C_{iss}	Input Capacitance	$\text{V}_{\text{DS}}=15\text{V}$, $\text{V}_{\text{GS}}=0\text{V}$, $f=1\text{MHz}$	---	1314	---	pF
C_{oss}	Output Capacitance		---	120	---	
C_{rss}	Reverse Transfer Capacitance		---	88	---	

Guaranteed Avalanche Characteristics

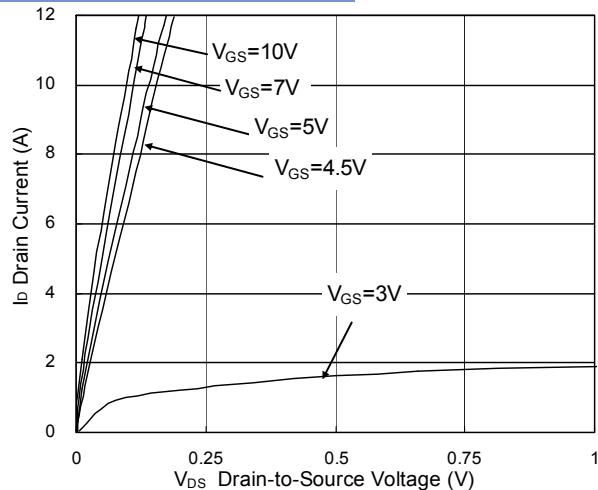
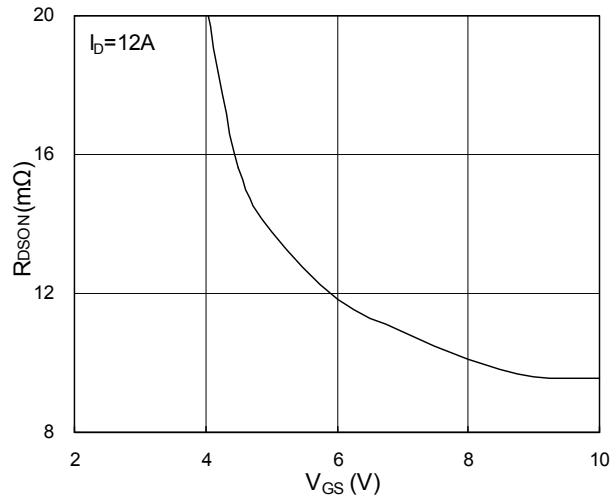
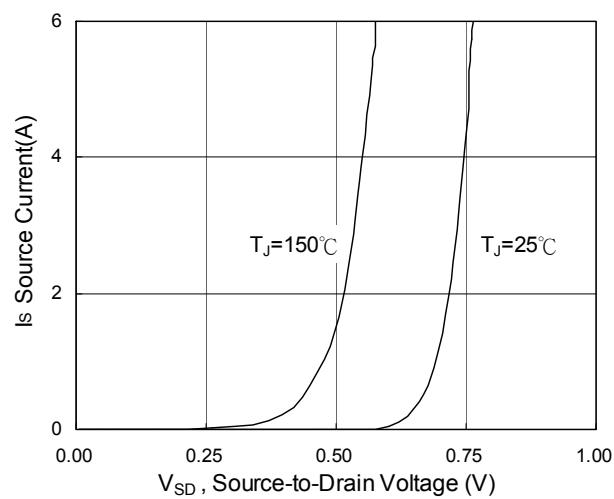
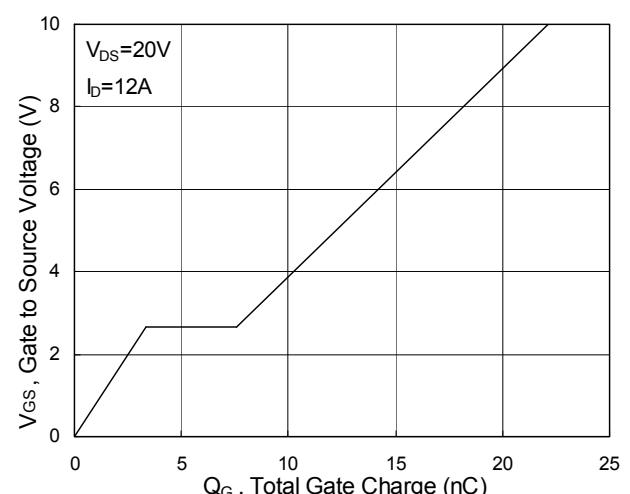
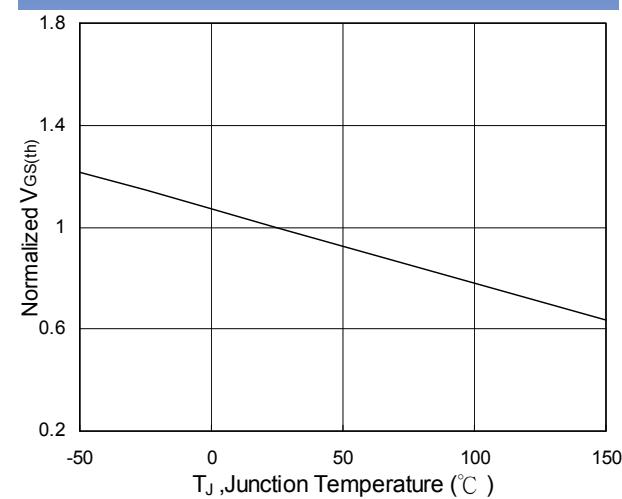
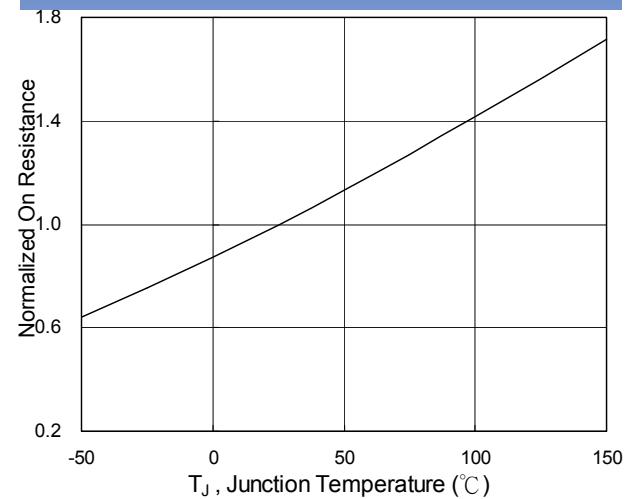
Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
EAS	Single Pulse Avalanche Energy ⁵	$\text{V}_{\text{DD}}=25\text{V}$, $L=0.1\text{mH}$, $\text{I}_{\text{AS}}=20\text{A}$	45	---	---	mJ

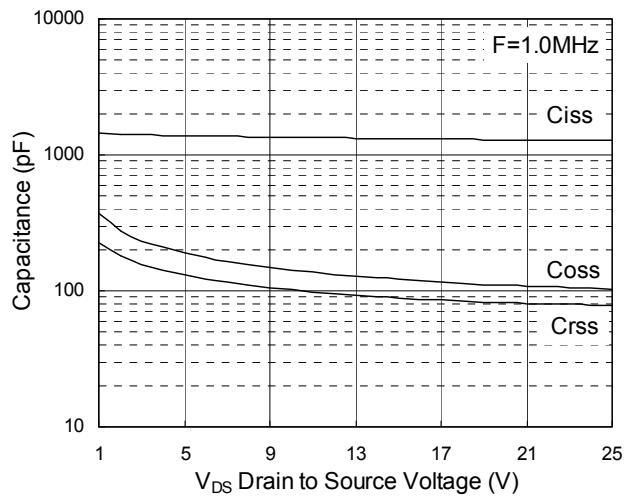
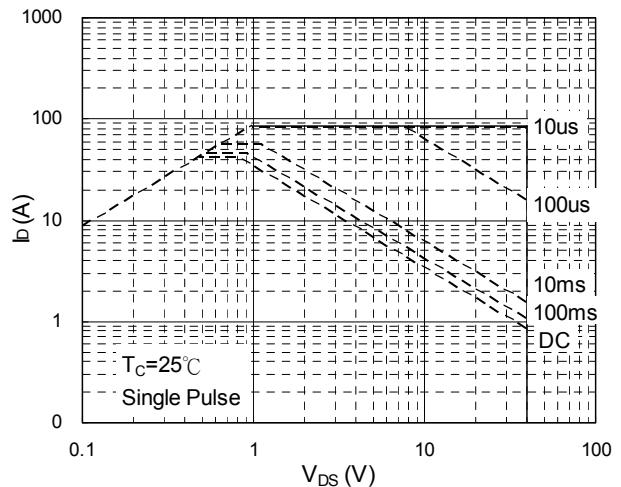
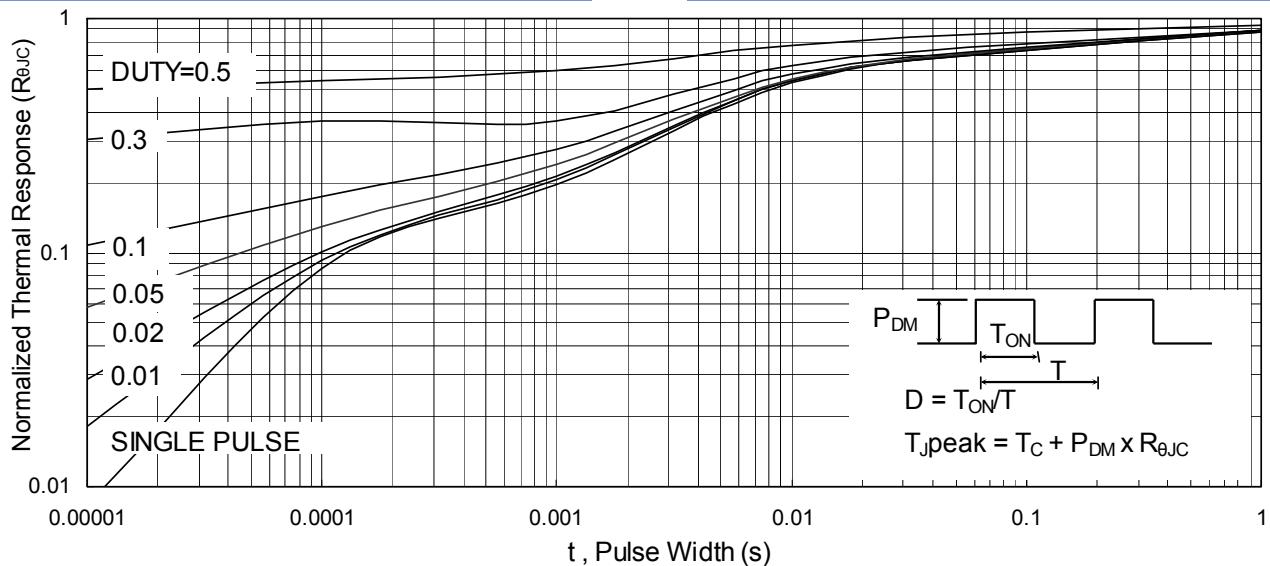
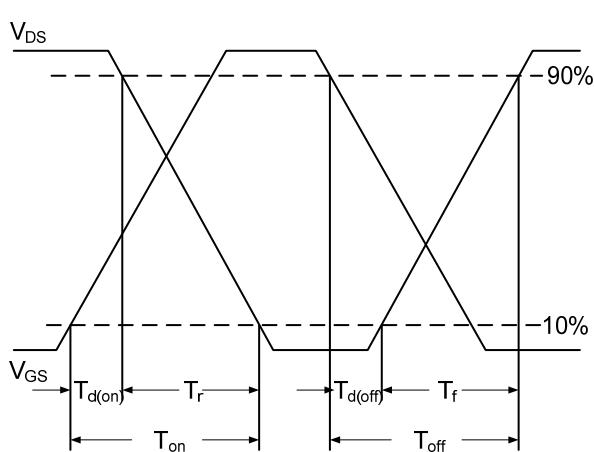
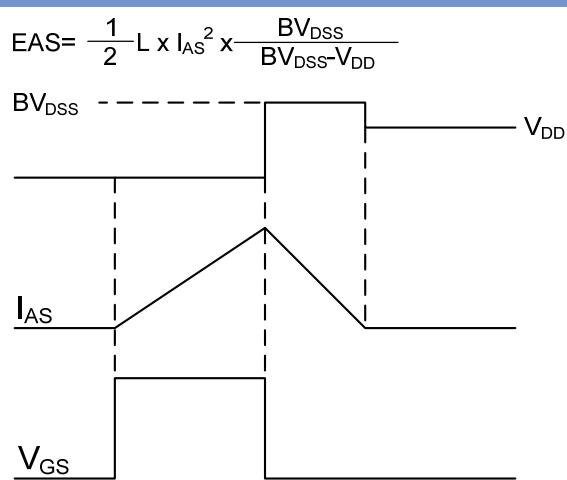
Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current ^{1,6}	$\text{V}_G=\text{V}_D=0\text{V}$, Force Current	---	---	42	A
I_{SM}	Pulsed Source Current ^{2,6}		---	---	85	A
V_{SD}	Diode Forward Voltage ²	$\text{V}_{\text{GS}}=0\text{V}$, $\text{I}_s=1\text{A}$, $T_J=25^\circ\text{C}$	---	---	1.2	V

Note :

1. The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.
2. The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$
3. The EAS data shows Max. rating . The test condition is $\text{V}_{\text{DD}}=25\text{V}$, $\text{V}_{\text{GS}}=10\text{V}$, $L=0.1\text{mH}$, $\text{I}_{\text{AS}}=25\text{A}$
4. The power dissipation is limited by 175°C junction temperature
5. The Min. value is 100% EAS tested guarantee.
6. The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Typical Characteristics

Fig.1 Typical Output Characteristics

Fig.2 On-Resistance vs. G-S Voltage

Fig.3 Forward Characteristics of Reverse

Fig.4 Gate-charge Characteristics

Fig.5 $V_{GS(th)}$ vs. T_J

Fig.6 Normalized R_{DSON} vs. T_J

N-Ch 40V Fast Switching MOSFETs

Fig.7 Capacitance

Fig.8 Safe Operating Area

Fig.9 Normalized Maximum Transient Thermal Impedance

Fig.10 Switching Time Waveform

Fig.11 Unclamped Inductive Switching Wave