


ULTRAFast RECOVERY POWER RECTIFIER

Features

- Ultrafast recovery time
- High voltage and high reliability
- High speed switching
- Low power loss and High efficiency
- Halogen-free component and RoHS compliant device

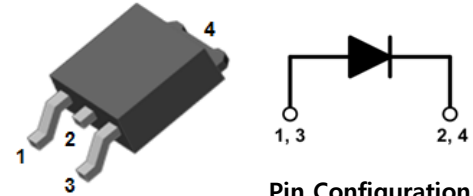

Pin Configuration

Pin 1, 3: Anode

Pin 2, 4: Cathode

Applications

- General purpose
- Switching mode power supply
- Free-wheeling diode for motor application
- Power switching circuits
- DC-DC converter systems

TO-252

Product Characteristics

$I_{F(AV)}$	10A
V_{RRM}	600V
t_{rr} (Typ.)	22ns

Description


The SFN10A600D is ideally as boost diode in discontinuous or critical mode power factor corrections. The planar structure and the platinum doper life time control guarantee the best overall performance, ruggedness and reliability characteristics.

The device is also intended for use as a freewheeling diode in power supplies and other power switching applications.

Ordering Information

Device	Marking Code	Package	Packaging
SFN10A600D	SFN10A600	TO-252	Tape & Reel

Marking Information



SFN10A600D = Specific Device Code

YWW = Year & Week Code Marking

-. Y = Year Code

-. WW = Week Code

Absolute Maximum Ratings (Limiting Values)

Characteristic	Symbol	Value	Unit
Maximum repetitive reverse voltage Maximum working peak reverse voltage Maximum DC blocking voltage	V_{RRM} V_{RWM} V_R	600	V
Maximum average forward rectified current	$I_{F(AV)}$	10	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	I_{FSM}	100	A
Storage temperature range	T_{stg}	-45°C to +150°C	°C
Maximum operating junction temperature	T_J	150	°C

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Maximum thermal resistance junction to case	$R_{th(j-c)}$	4	°C/W

Electrical Characteristics

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Peak forward voltage drop	$V_{FM}^{(1)}$	$I_{FM} = 10A$ $T_J = 25^\circ C$	-	1.58	2.1	V
Reverse leakage current	$I_{RM}^{(1)}$	$V_R = V_{RRM}$ $T_J = 25^\circ C$	-	-	5	uA
		$T_J = 125^\circ C$	-	-	200	uA
Reverse recovery time	t_{rr}	$I_F = 1A, di/dt = -100 A/us$	-	22	27	ns
Junction capacitance	C_j	$V_R = 10V_{DC}, f=1MHz$	-	38	-	pF

Note : (1) Pulse test : $t_p \leq 380 \mu s$, Duty cycle $\leq 2\%$

Rating & Electrical Characteristic Curves

Fig. 1) Typical Forward Characteristics

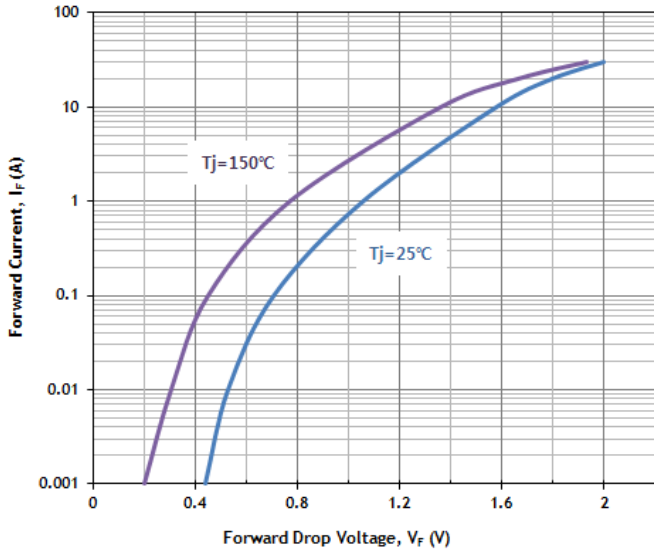


Fig. 2) Typical Reverse Characteristics

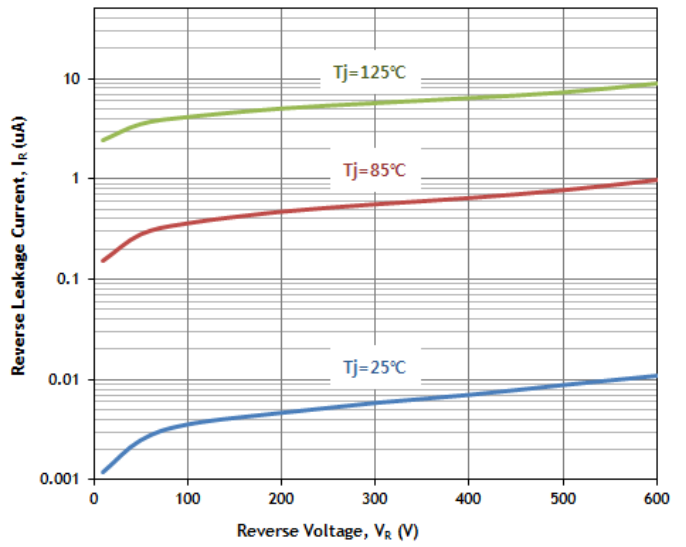


Fig. 3) Typical Junction Capacitance Characteristics

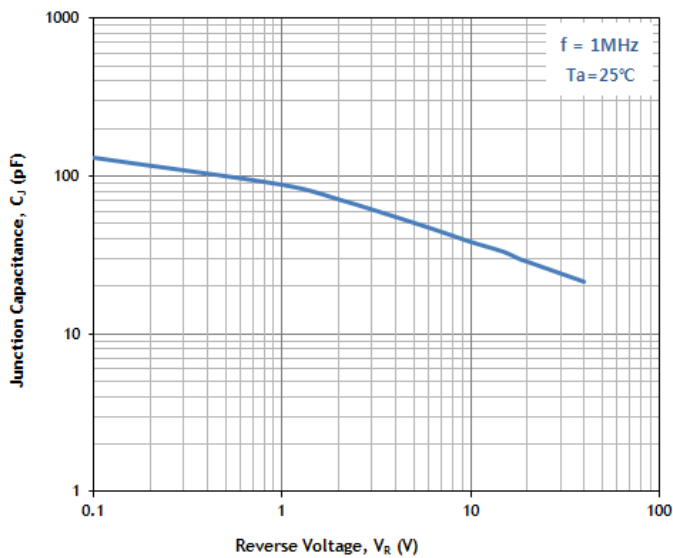


Fig. 4) Peak Forward Surge Current Characteristics

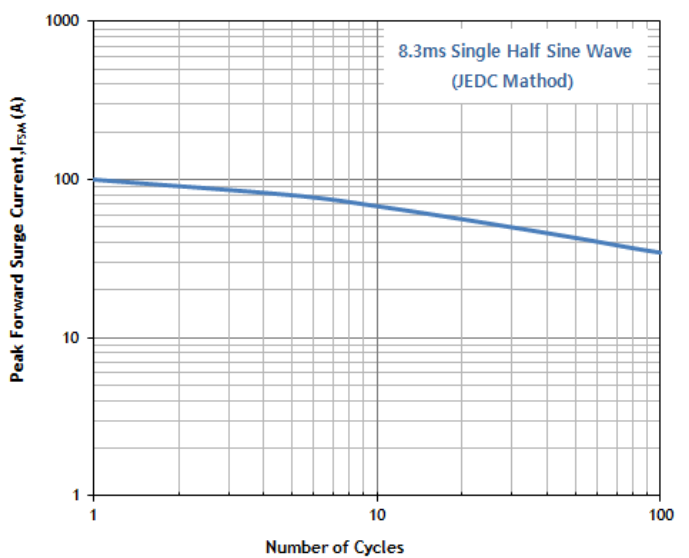


Fig. 5) Thermal Impedance Characteristics




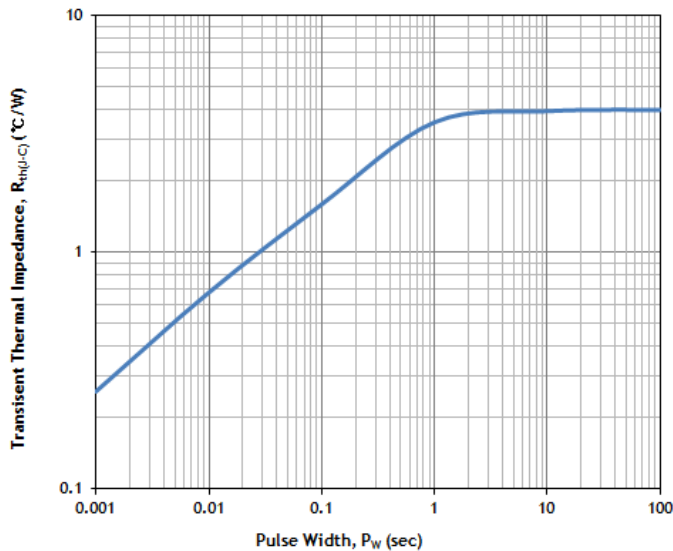


Fig. 6) Average Forward Current Characteristics

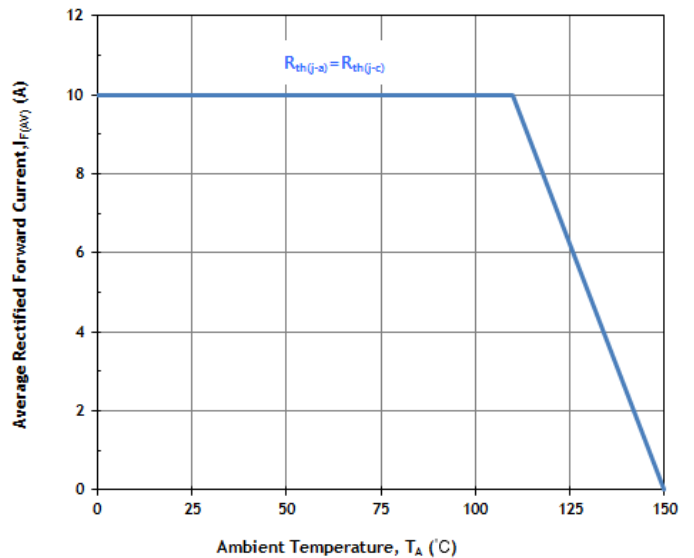


Package Outline Dimension

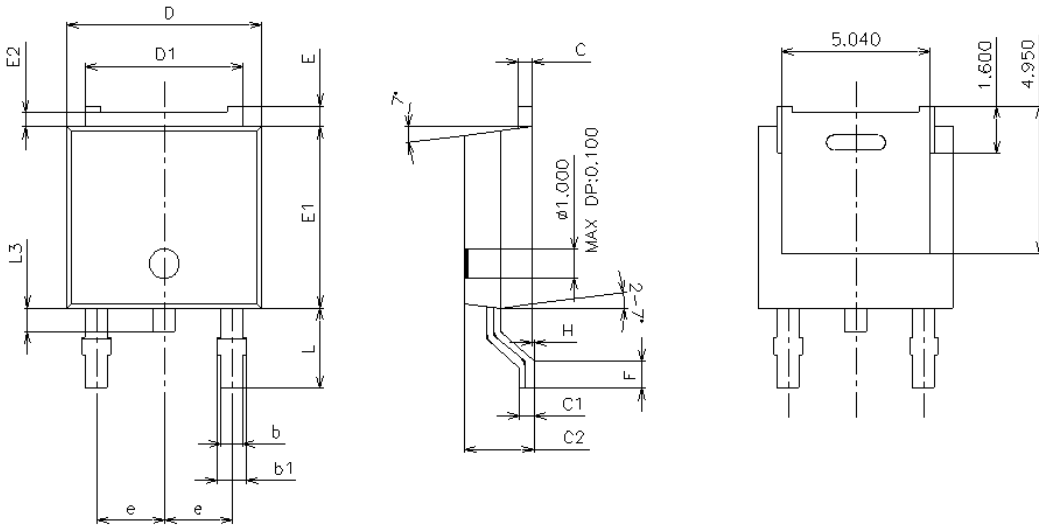

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
D	6.40	6.60	6.80	
D1	5.14	5.34	5.54	
E	0.50	0.70	0.90	
E1	5.90	6.10	6.30	
E2	0.50 TYP			
A	2.20	2.30	2.40	
A1	0.87	1.07	1.27	
C	0.40	0.50	0.60	
C1	0.40	0.50	0.60	
C2	2.10	2.30	2.50	
L	2.50	2.70	2.90	
L3	0.60	0.80	1.00	
b	0.66	0.76	0.86	
b1	0.96 MAX			
e	2.10	2.30	2.50	
F	0.80 MIN			
H	0.00	-	0.10	

※ Recommended Land Pattern (Unit: mm)

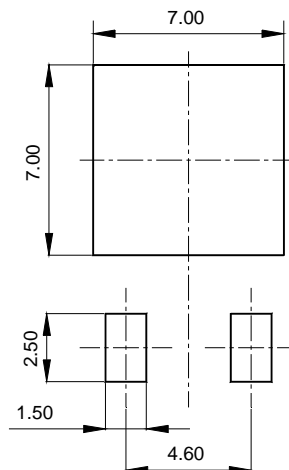

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.