



HIGH SPEED RECTIFIER APPLICATION.

FEATURES

- Average Output Rectified Current : $I_O=10A(T_c=101^\circ C)$.
- Repetitive Peak Reverse Voltage : $V_{RRM}=200V$.
- Rectifier Stack of Single Phase Center Tap Type.

POLARITY

- CC TYPE
- CATHODE COMMON
- CA TYPE
- ANODE COMMON



MAXIMUM RATING ($T_a=25^\circ C$)



CHARACTERISTIC		SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	F1B2CCI F1B2CAI	V_{RRM}	200	V
Average Output Rectified Current ($T_c=101^\circ C$) (Fig.)		I_O	10	A
Peak One Cycle Surge Forward Current (Non-Repetitive)		I_{FSM}	60 (50Hz) 70 (60Hz)	A
Junction Temperature		T_j	-40 ~ 150	$^\circ C$
Storage Temperature Range		T_{stg}	-40 ~ 150	$^\circ C$

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ C$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Peak Forward Voltage (Note)	V_{FM}	$I_{FM}=5A$	-	-	1.4	V
Repetitive Peak Reverse Current (Note)	I_{RRM}	$V_{RRM}=\text{Rated}$	-	-	10	μA
Reverse Recovery Time	t_{rr}	$I_F=0.1A, I_R=0.1A$	-	-	400	nS
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	3.5	$^\circ C/W$


Note : A Value of one cell.

Fig. EXAMPLE OF RECTIFYING CIRCUIT

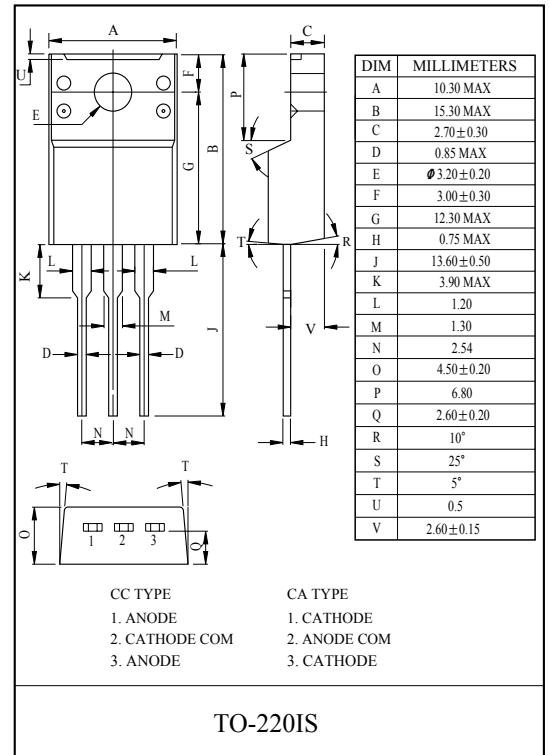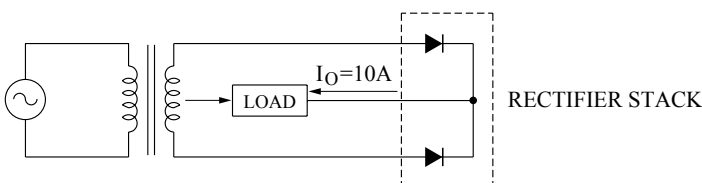


F1B2CCI/CAI


$I_F - V_F$

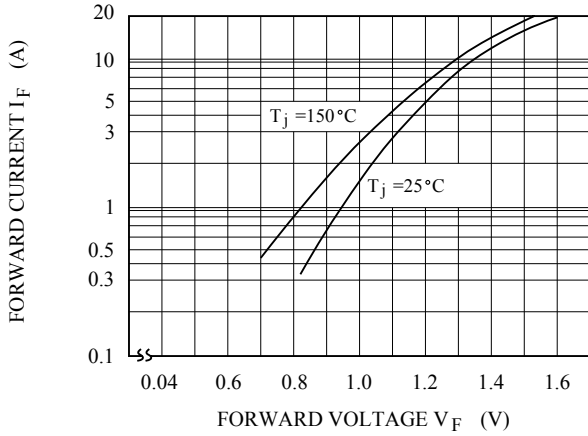


$I_R - V_R$

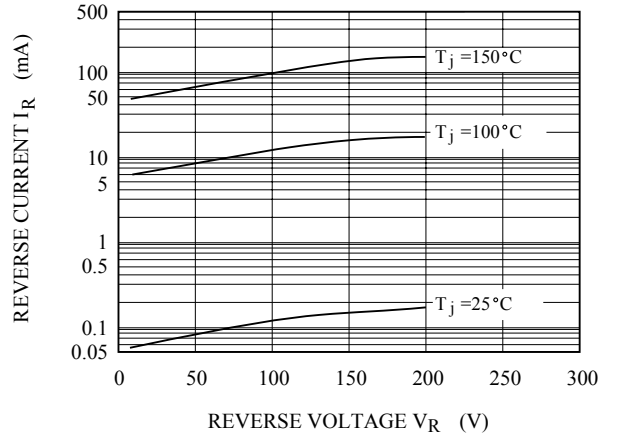


$P_{F(AV)} - I_{F(AV)}$

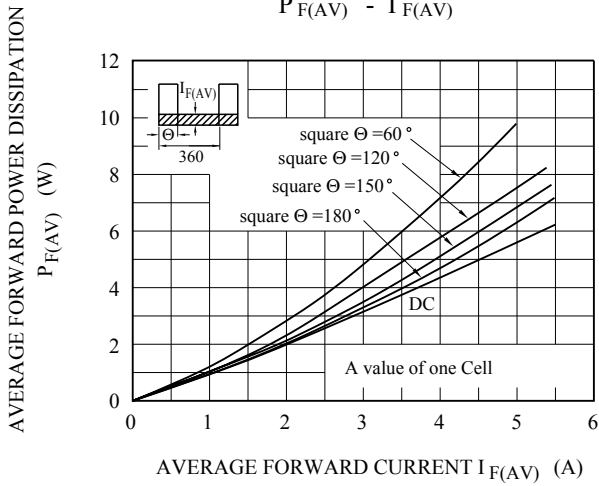

CURRENT DERATING (CASE)

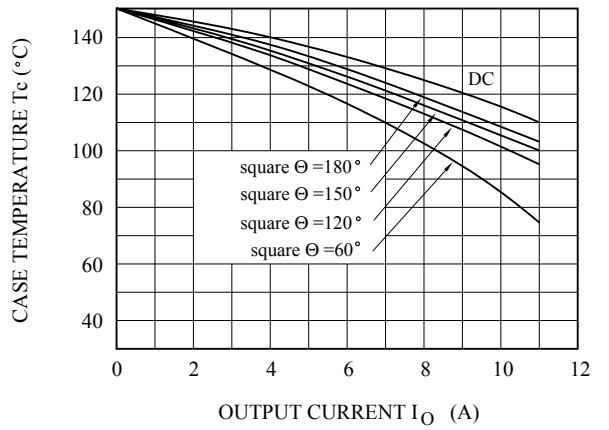

SURGE FORWARD CURRENT (NON-REPETITIVE)

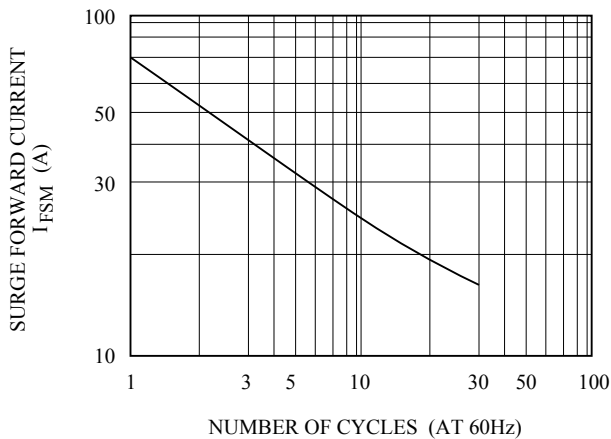

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.