



**CHENMKO ENTERPRISE CO.,LTD**

*Lead free devices*

**SCHOTTKY BARRIER RECTIFIER**

**VOLTAGE RANGE 20 - 40 Volts    CURRENT 10 Amperes**

**S10P20PT**

**THRU**

**S10P40PT**

#### FEATURES

- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* Metal Silicon junction, majority carrier conduction
- \* Low power loss, high efficiency
- \* High current capability, low forward voltage drop
- \* Guardring for overvoltage protection
- \* For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- \* High temperature soldering in accordance with CECC 802 / Reflow guaranteed

#### MECHANICAL DATA

**Case:** JEDEC DPAK molded plastic

**Terminals:** Lead solderable per MIL-STD-750, Method 2026

**Polarity:** As marked


**Weight:** 1.7 grams ( Approximately )

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



**DPAK**

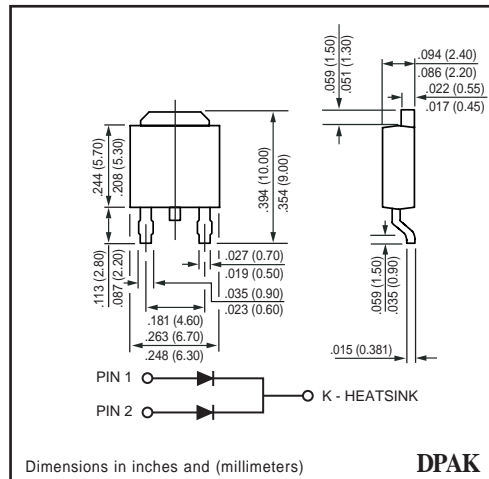

**MAXIMUM RATINGS** ( At TA = 25°C unless otherwise noted )

RATINGS	SYMBOL	S10P20PT	S10P30PT	S10P40PT	UNITS
Maximum Recurrent Peak Reverse Voltage	VRRM	20	30	40	Volts
Maximum RMS Voltage	VRMS	14	21	28	Volts
Maximum DC Blocking Voltage	VDC	20	30	40	Volts
Maximum Average Forward Rectified Current	IO	10.0			Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	IFSM	150			Amps
Typical thermal resistance per leg ( NOTE 1 )	R θJC	3.0			°C / W
Operating and Storage Temperature Range	TJ, TSTG	-40 to +125			°C

**ELECTRICAL CHARACTERISTICS** ( At TA = 25°C unless otherwise noted )

CHARACTERISTICS	SYMBOL	S10P20PT	S10P30PT	S10P40PT	UNITS
Maximum Instantaneous Forward Voltage at 5.0 A DC	VF	0.55			Volts
Maximum instantaneous reverse current at TC = 25°C	IR	1.0			mAmps
rated DC blocking voltage per leg ( NOTE 2 )		50			mAmps

NOTES : 1. Thermal resistance from junction to case per leg  
2. Pulse test : 300 us pulse width, 1% duty cycle

2002-5

## RATING CHARACTERISTIC CURVES ( S10P20PT THRU S10P40PT )

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

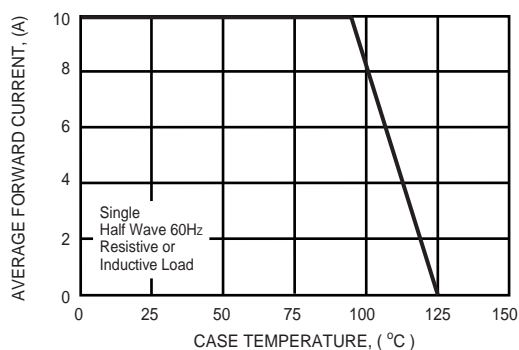


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

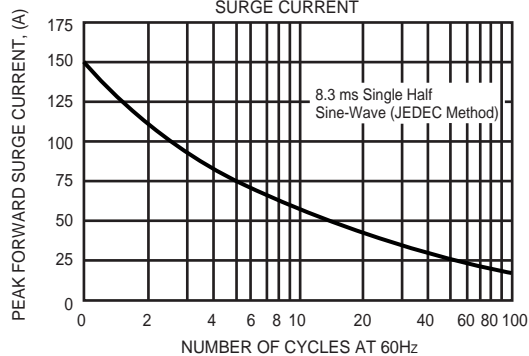


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

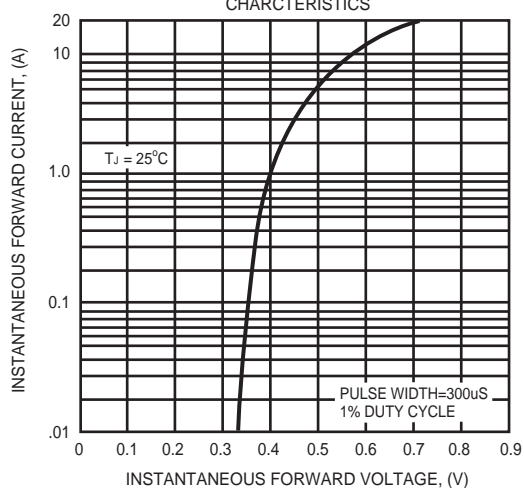


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

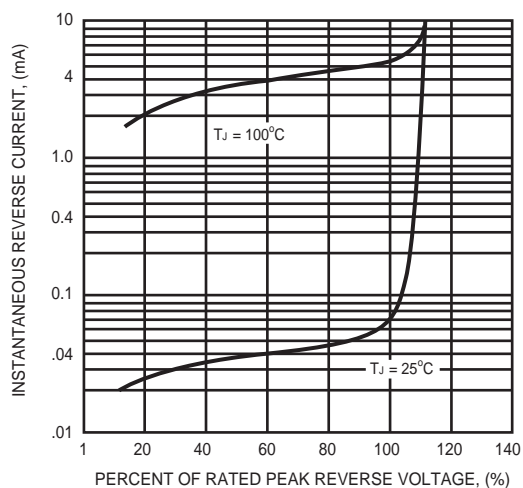


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

