PANJIT SEMI CONDUCTOR

# ER3A~ER3J

## SURFACE MOUNT RECTIFIER

**VOLTAGE** 50 to 600 Volts **CURRENT** 3.0 Amperes

SMC / DO-214AB Unit: inch ( mm )




### FEATURES

- For surface mounted applications
- High temperature metallurgically bonded-no compression contacts as found in other diode-constructed rectifiers
- Glass passivated junction
- Built-in strain relief
- Easy pick and place
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICALDATA

- Case: JEDEC DO-214AB molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Indicated by cathode band
- Standard packaging: 16mm tape (EIA-481)
- Weight: 0.0082 ounce, 0.2325 gram
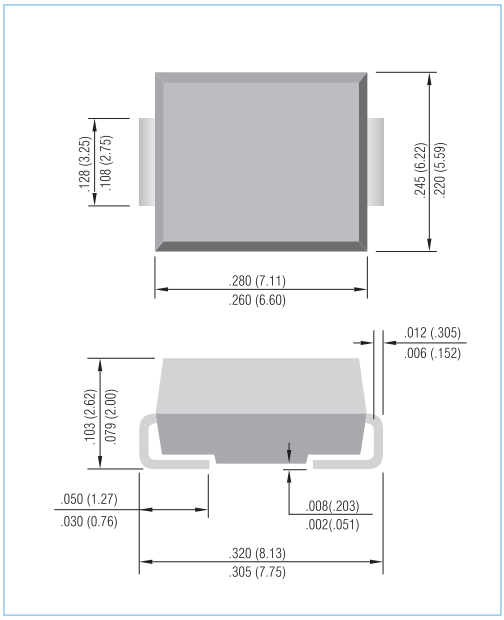
### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

| PARAMETER | SYMBOL | ER3A | ER3B | ER3C | ER3D | ER3E | ER3G | ER3J | UNITS |
|---|---|---|---|---|---|---|---|---|---|
| Maximum Recurrent Peak Reverse Voltage | $V_{RRM}$ | 50 | 100 | 150 | 200 | 300 | 400 | 600 | V |
| Maximum RMS Voltage | $V_{RMS}$ | 35 | 70 | 105 | 140 | 210 | 280 | 420 | V |
| Maximum DC Blocking Voltage | $V_{DC}$ | 50 | 100 | 150 | 200 | 300 | 400 | 600 | V |
| Maximum Average Forward Current at $T_L$=75°C | $I_{F(AV)}$ | 3.0 | | | | | | | A |
| Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method) | $I_{FSM}$ | 100 | | | | | | | A |
| Maximum Forward Voltage at 3.0A | $V_F$ | 0.95 | | | | 1.25 | | 1.7 | V |
| Maximum DC Reverse Current $T_J$=25 °C<br>at Rated DC Blocking Voltage $T_J$=100 °C | $I_R$ | 1.0<br>200 | | | | | | | µA |
| Maximum Reverse Recovery Time (Note 1) | $t_{rr}$ | 35 | | | | | | | ns |
| Typical Junction capacitance (Note 2) | $C_J$ | 45 | | | | | | | pF |
| Typical thermal Resistance (Note 3) | $R_{\theta JL}$ | 16 | | | | | | | °C / W |
| Operating and Storage Temperature Range | $T_J$,$T_{STG}$ | -55 to +150 | | | | | | | °C |

NOTES:1. Reverse Recovery Test Conditions: $I_F$=0.5A, $I_R$=1.0A, $I_{rr}$=0.25A
2. Measured at 1 MHz and applied $V_r$ = 4.0 volts.
3. 8.0 $mm^2$ ( .013mm thick ) land areas.

# ER3A~ER3J

## RATING AND CHARACTERISTIC CURVES

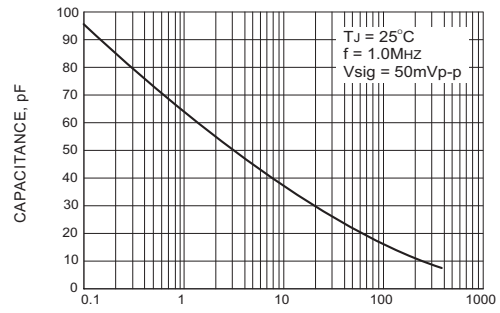


FIG.1 TYPICAL JUNCTION CAPACITANCE

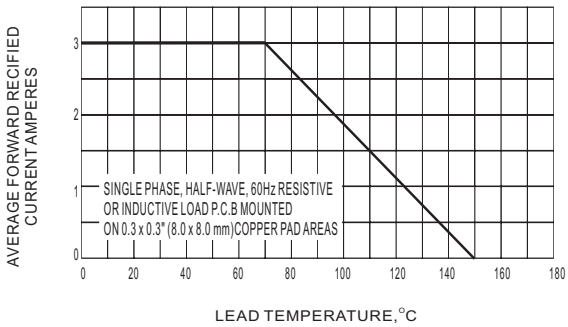


FIG.2 MAXIMUM AVERAGE FORWARD CURRENT RATING

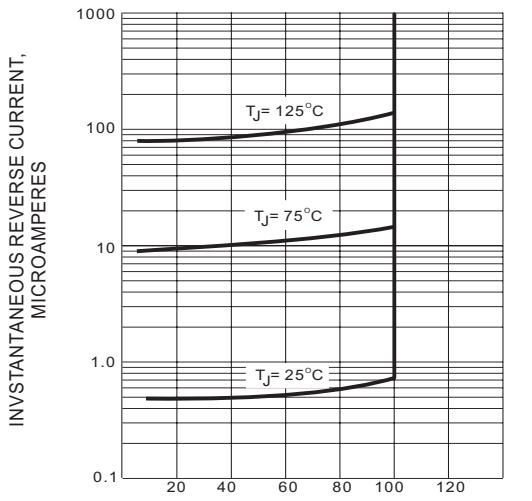


FIG.3 TYPICAL REVERSE CHARACTERISTICS

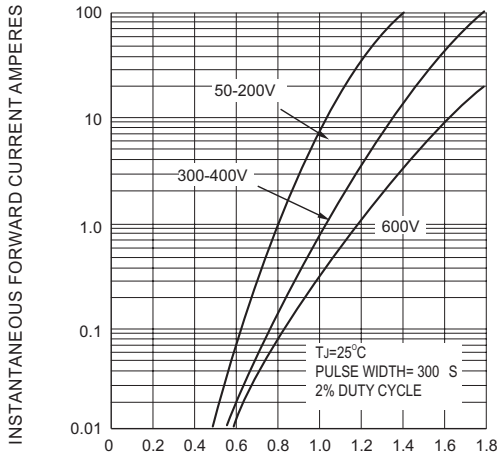


FIG.4 TYPICAL FORWARD CHARACTERISTICS

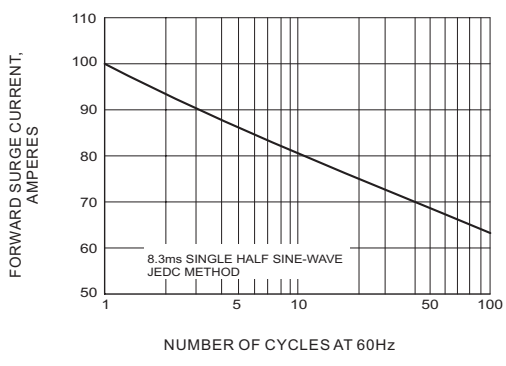


FIG.5 MAXIMUM NON-REPEITIVE SURGE CURRENT

# ER3A~ER3J

## MOUNTING PAD LAYOUT

SMC Unit: inch ( mm )




## ORDER INFORMATION

- Packing information

  T/R - 3K per 13" plastic Reel

  T/R - 0.5Kper 7" plastic Reel
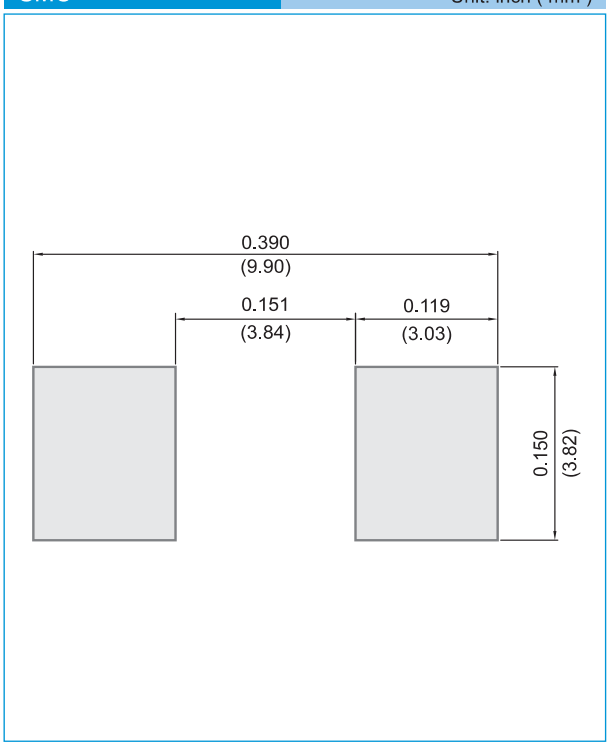
## LEGAL STATEMENT

**Copyright PanJit International, Inc 2009**

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.