

FQPF47P06 / FQPF47P06YDTU P-Channel QFET[®] MOSFET -60 V, -30 A, 26 mΩ


Description

This P-Channel enhancement mode power MOSFET is produced using Fairchild Semiconductor®'s proprietary planar stripe and DMOS technology. This advanced MOSFET technology has been especially tailored to reduce on-state resistance, and to provide superior switching performance and high avalanche energy strength. These devices are suitable for switched mode power supplies, audio amplifier, DC motor control, and variable switching power applications.

Features

- -30 A, -60 V, $R_{DS(on)}$ =26 m Ω (Max.) @V_{GS}=-10 V, I_D=-15 A
- Low Gate Charge (Typ. 84 nC)
- Low Crss (Typ. 320 pF)
- 100% Avalanche Tested
- 175°C Maximum Junction Temperature Rating





Absolute Maximum Ratings T_C = 25°C unless otherwise noted

Symbol	Parameter		FQPF47P06 / FQPF47P06YDTU	Unit
V _{DSS}	Drain-Source Voltage		-60	V
I _D	Drain Current - Continuous ($T_C = 25^{\circ}C$))	-30	А
	- Continuous (T _C = 100°C	C)	-21.2	А
I _{DM}	Drain Current - Pulsed	(Note 1)	-120	А
V _{GSS}	Gate-Source Voltage		± 25	V
E _{AS}	Single Pulsed Avalanche Energy	(Note 2)	820	mJ
I _{AR}	Avalanche Current	(Note 1)	-30	А
E _{AR}	Repetitive Avalanche Energy	(Note 1)	6.2	mJ
dv/dt	Peak Diode Recovery dv/dt	(Note 3)	-7.0	V/ns
P _D	Power Dissipation ($T_C = 25^{\circ}C$)		62	W
	- Derate above 25°C		0.41	W/°C
T _J , T _{STG}	Operating and Storage Temperature Range	е	-55 to +175	°C
ΤL	Maximum lead temperature for soldering p 1/8" from case for 5 seconds	urposes,	300	°C

Thermal Characteristics


Symbol	Parameter	Тур	Max	Unit
$R_{ extsf{ heta}JC}$	Thermal Resistance, Junction-to-Case		2.42	°C/W
$R_{ hetaJA}$	Thermal Resistance, Junction-to-Ambient		62.5	°C/W

March 2013


FQPF47P06 / FQPF47P06YDTU P-Channel MOSFET


www.fairchildsemi.com

Symbol	Parameter	Test Conditions	Min	Тур	Max	Unit
Off Cha	racteristics					
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _D = -250 μA	-60			V
ΔBV _{DSS} ΔT _J	Breakdown Voltage Temperature Coefficient	$I_D = -250 \ \mu\text{A}$, Referenced to 25°C		-0.06		V/°C
DSS	Zero Gate Voltage Drain Current	$V_{DS} = -60 \text{ V}, \text{ V}_{GS} = 0 \text{ V}$			-1	μA
		V _{DS} = -48 V, T _C = 150°C			-10	μA
GSSF	Gate-Body Leakage Current, Forward	$V_{GS} = -25 V, V_{DS} = 0 V$			-100	nA
GSSR	Gate-Body Leakage Current, Reverse	$V_{GS} = 25 \text{ V}, V_{DS} = 0 \text{ V}$			100	nA
On Cha	racteristics					
/ _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = -250 μA	-2.0		-4.0	V
R _{DS(on)}	Static Drain-Source On-Resistance	$V_{GS} = -10 \text{ V}, \text{ I}_{D} = -15 \text{ A}$		0.021	0.026	Ω
ĴFS	Forward Transconductance	$V_{DS} = -30 \text{ V}, \text{ I}_{D} = -15 \text{ A}$ (Note 4)		19		S
_			1	1		
	ic Characteristics		1			_
C _{iss}	Input Capacitance	$V_{DS} = -25 V, V_{GS} = 0 V,$		2800	3600	pF
Coss Crss	Output Capacitance Reverse Transfer Capacitance	f = 1.0 MHz		1300 320	1700 420	pF pF
d(on)	ng Characteristics Turn-On Delay Time Turn-On Rise Time	$V_{DD} = -30 \text{ V}, \text{ I}_{D} = -23.5 \text{ A},$		50 450	110 910	ns ns
r	Turn-On Rise Time	$V_{DD} = -30 \text{ V}, I_D = -23.5 \text{ A},$ $R_G = 25 \Omega$		450	910	ns
d(off)	Turn-Off Delay Time	Ŭ		100	210	ns
f	Turn-Off Fall Time	(Note 4, 5)		195	400	ns
ე ^g	Total Gate Charge	$V_{DS} = -48 \text{ V}, \text{ I}_{D} = -47 \text{ A},$		84	110	nC
2 _{gs}	Gate-Source Charge	V _{GS} = -10 V		18		nC
ე _{gd}	Gate-Drain Charge	(Note 4, 5)		44		nC
Drain S	ource Diode Characteristics a	ad Maximum Patinga				
s	Maximum Continuous Drain-Source Did	•			-30	А
S SM	Maximum Pulsed Drain-Source Diode F				-120	A
/ _{SD}	Drain-Source Diode Forward Voltage	$V_{GS} = 0 \text{ V}, \text{ I}_{S} = -30 \text{ A}$			-4.0	V
rr	Reverse Recovery Time	$V_{GS} = 0 \text{ V}, \text{ I}_{S} = -47 \text{ A},$		130		ns
ີ ຊ _{rr}	Reverse Recovery Charge	$dI_{\rm F} / dt = 100 \text{ A}/\mu \text{s}$ (Note 4)		0.55		μC
ptes: Repetitive R L = 1.06mH, $I_{SD} \leq -47A$, Pulse Test :	ating : Pulse width limited by maximum junction tempe $I_{AS} = -30A, V_{DD} = -25V, R_G = 25 \Omega$, Starting $T_J = 25^{\circ}C$ di/dt $\leq 300A/\mu s, V_{DD} \leq BV_{DSS}$, Starting $T_J = 25^{\circ}C$ Pulse width $\leq 300 \mu s$, Duty cycle $\leq 2\%$ independent of operating temperature	rature	<u> </u>	0.00	<u> </u>	<u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u><u></u></u>

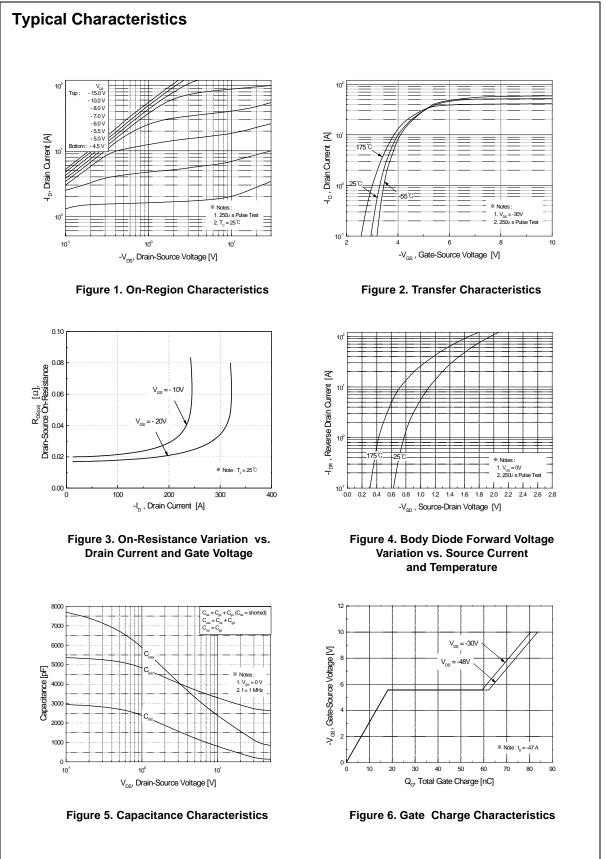


FQPF47P06 / FQPF47P06YDTU P-Channel MOSFET

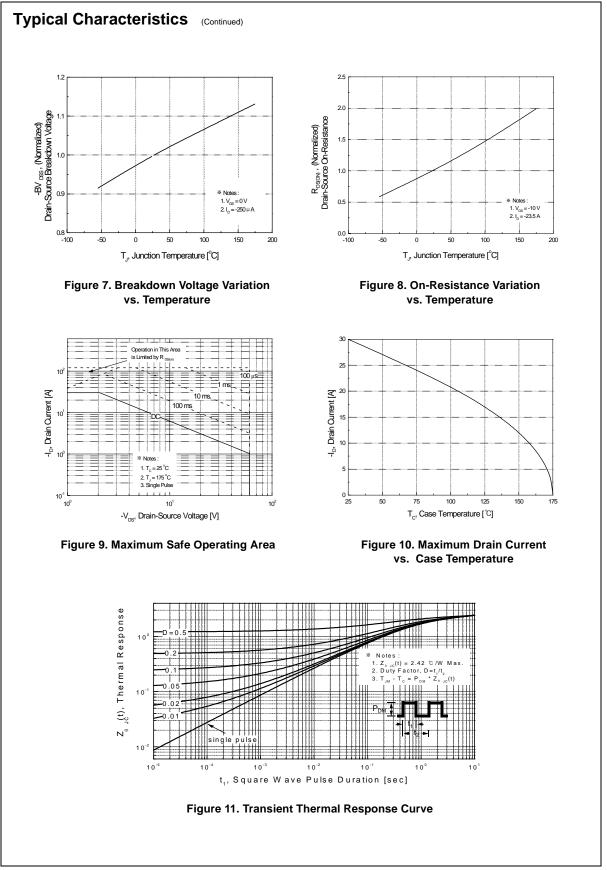


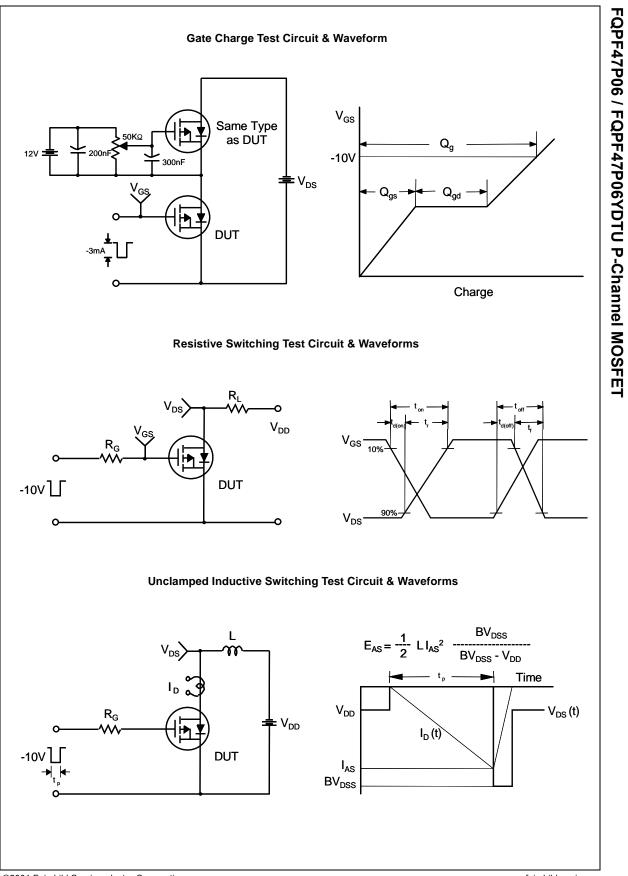

©2001 Fairchild Semiconductor Corporation FQPF47P06 / FQPF47P06YDTU Rev. C0


www.fairchildsemi.com

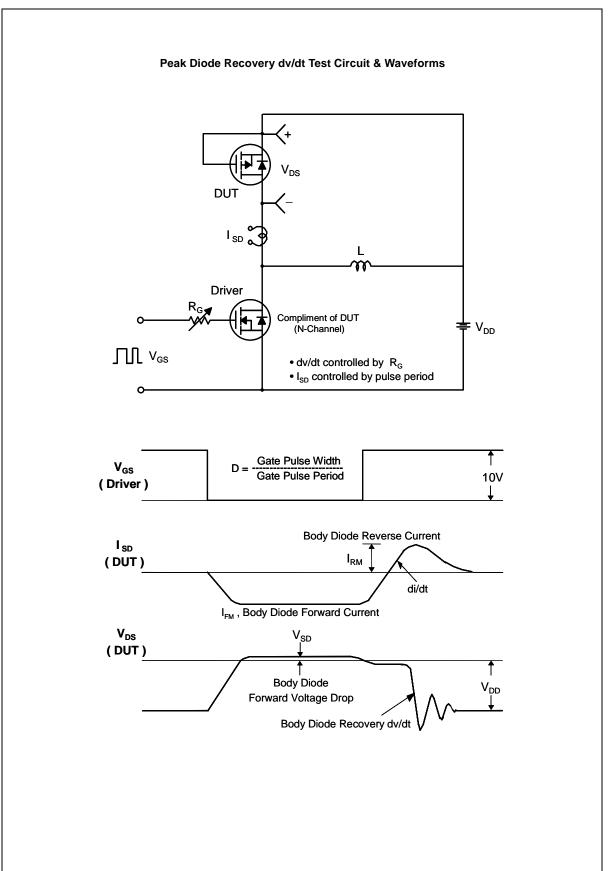

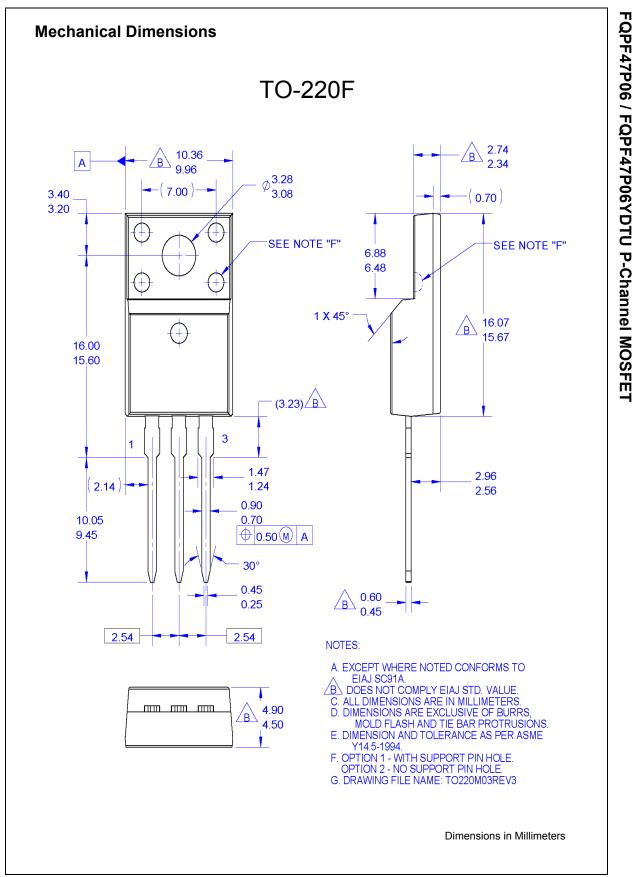

©2001 Fairchild Semiconductor Corporation FQPF47P06 / FQPF47P06YDTU Rev. C0

www.fairchildsemi.com

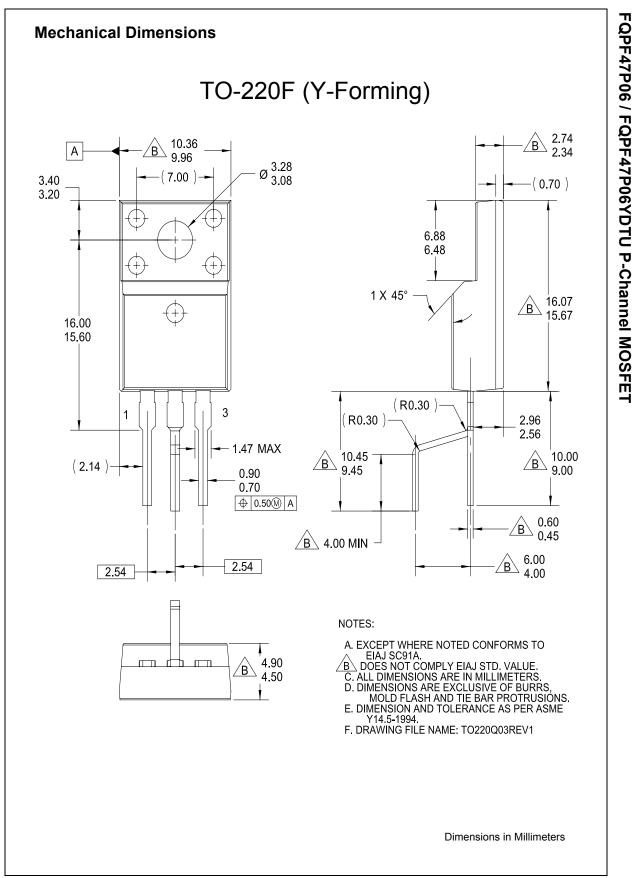



SEMICONDUCTOR

TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

R

2Cool™ AccuPower™ AX-CAP® BitSiC™ Build it Now™ CorePLUS™ CorePOWER™ CROSSVOLT™ CTI ™ Current Transfer Logic™ DEUXPEED[®] Dual Cool™ **EcoSPARK[®]** EfficentMax™ **ESBC™**

F Fairchild® Fairchild Semiconductor® FACT Quiet Series™ FACT[®] FAST® FastvCore™ FETBench™

F-PFS™ FRFET® Global Power ResourceSM Green Bridge™ Green FPS™ Green FPS™ e-Series™ Gmax™ GTO™ IntelliMAX™ **ISOPLANAR™** Marking Small Speakers Sound Louder and Better™ MegaBuck™ MIČROCOUPLER™ MicroFET™ MicroPak™ MicroPak2™ MillerDrive™ MotionMax™ mWSaver™ OptoHiT™ **OPTOLOGIC**® **OPTOPLANAR[®]**

FPS™

PowerTrench[®] PowerXS[™] Programmable Active Droop™ QFET[®] QS™ Quiet Series™ RapidConfigure™ тм ng our world, 1mW/W/kW at a time™ SignalWise™ SmartMax™ SMART START™ Solutions for Your Success™ SPM® STEALTH™ SuperFET[®] SuperSOT™-3 SuperSOT™-6 SuperSOT™-8 SupreMOS® SvncFET™

SYSTEM^{®*} GENERAL TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic® TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TranSiC® TriFault Detect™ TRUECURRENT®* μSerDes™ UHC® Ultra FRFET™ UniFET™ VCX™ VisualMax™ VoltagePlus™ XS™

Svnc-Lock™

*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are 1. intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or 2. system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS Definition of Terms

Design ction	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
ction	
	notice to improve design.
ction	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
uction	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.